

Lift-A-Lift® Forklift Service Lift

**Fast, Safe and Easy Maintenance for
Forklifts • Industrial Vehicles • Light Trucks**

Tilt-or-Lift, Inc., the leading designer of specialty lifts since 1973, has raised the art of forklift maintenance to new heights with the *Lift-A-Lift*® forklift service lift.

The *Lift-A-Lift* service lift, model V-13-A, is designed to allow complete access to the underside parts of forklifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. Just drive the vehicle onto the 16 inch wide runways. The self-leveling lift raises the vehicle up to 71 inches so all maintenance can be performed while standing.

High Marks for Safety and Versatility

The *Lift-A-Lift* service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.


The *Lift-A-Lift* service lift is portable and has removable runway panels and floor beam for easier access. Standard 16 inch wide runways are factory set at 52 to 68 inches (outside dimension) to accommodate a wide range of vehicles. The lift is available in 13,000 lbs. GVW capacity. A variety of popular options is available to enhance its utility. All lifts are shipped assembled and factory tested and carry a full one-year warranty.

The *Lift-A-Lift* service lift; one of the fine family of forklift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available — anywhere.

"We stand under our products."

**TILT OR
LIFT**
INCORPORATED
Manufacturers of
Fork Lift Maintenance Lifts

TAYLOR
MATERIAL HANDLING & CONVEYOR
Phone: 419-867-3560
www.taylormhc.com

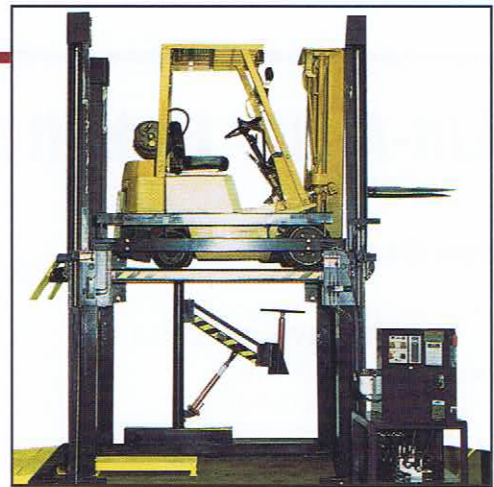

Lift-A-Lift® Forklift Service Lift

Specifications

- Capacity: GVW (Model V-13AF8)
13,000 lbs.
- Entry width 52" to 68"
(Specify 4" increments)
- Minimum ceiling height: 12' 7"
- Ramp: length 4'
- Max runway height: 71"
- Safety locks: automatic
- Motor: 3 hp
Power: 3-phase only
- Shipping weight:
6200 lbs. (approx.)
- 16" wide runways x 8' long
- 20" to 36" inside working width
(Specify 4" increments)

*All units are subject to change
and modifications*


Note: Dimensions may
change without notice.

Features

- Portable, hydraulic lift
- Auto safety locks
- Auto self-leveling system
- Removable runway panels
- Lockable control panels
- Shipped assembled and
factory tested

Options

- Hydraulic motor/transmission jack
- Ramp - 10' long
- Pallet jack combo kit
- center ramp & 2 side rails
- Wheel-freeing device
- Three-wheel platform

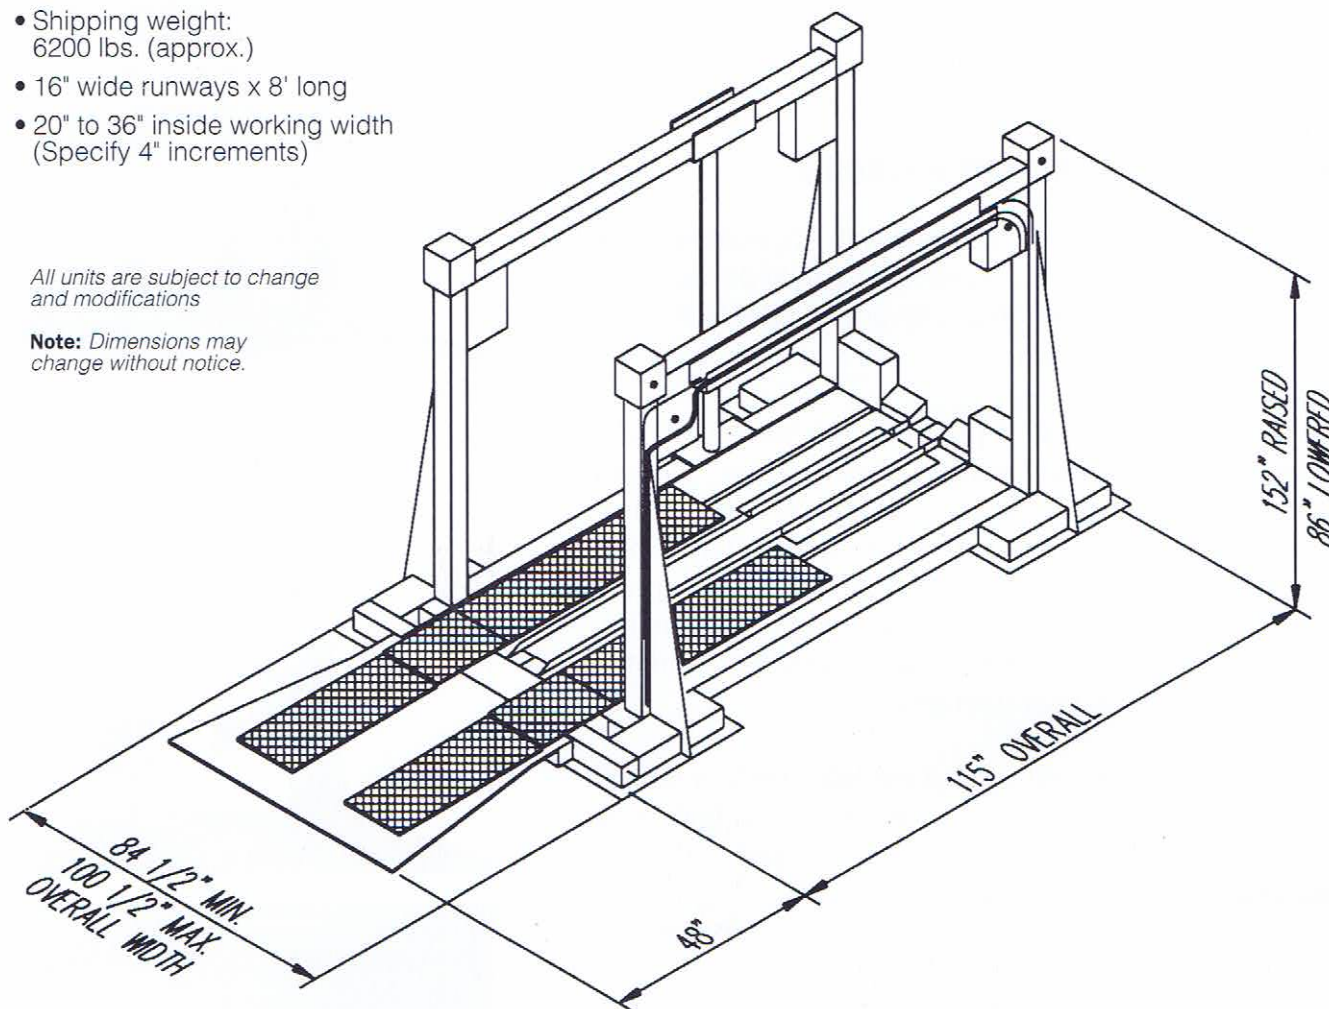

LIFT
OR
LIFT
INCORPORATED
Manufacturers of
Fork Lift Maintenance Lifts

TAYLOR
MATERIAL HANDLING & CONVEYOR
Phone: 419-867-3560
www.taylormhc.com

V-25-AF8 Lift-A-Lift®

Forklift Service Lift

**Fast, Safe and Easy Maintenance for
Forklifts • Industrial Vehicles • Light Trucks**

Tilt-Or-Lift, Inc., the leading designer of specialty lifts since 1973, has raised the art of forklift maintenance to new heights with the Lift-A-Lift® forklift service lift.

The Lift-A-Lift service lift model V-25-AF8 is designed to allow complete access to underside parts of forklifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. Just drive the vehicle onto the 22 inch wide runways. The self-leveling lift raises the vehicle up to 72" so all service and maintenance can be done while standing.

High Marks for Safety and Versatility

The Lift-A-Lift service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.

The Lift-A-Lift service lift is portable and has removable runway panels and floor beam for easier access. Standard 22 inch wide runways and 66 inch wide entry width accommodate a wide range of vehicles. This lift has a capacity of 25,000 or 30,000 pounds. A wide variety of popular options is available to enhance its versatility. All lifts are shipped assembled, factory tested and carry a full one-year warranty.

The Lift-A-Lift service lift; one of the fine family of forklift service lifts available from Tilt-Or-Lift, Inc. The lift specialists. There are no finer lifts available — anywhere.

"We stand under our products."



**Manufacturers of
Forklift Maintenance Lifts**



V-25-AF8 Lift-A-Lift® Forklift Service Lift

Specifications

- Capacity: 25,000# G.V.W.
- Entry width: 64"
- Minimum ceiling height: 12'-7"
- Max runway height: 72"
- Safety locks are automatic
- Motor: 5 horsepower
- Power: 230/460/3/60
- Runways: 22" wide x 8' long
- Shipping weight: 7500#

Features


- Portable, hydraulic lift
- Auto safety locks
- Auto self-leveling system
- Removable runway panels
- Removable right-side floor beam
- Lockable control panels
- Shipped assembled and factory tested

Options

- Hydraulic motor/transmission jack
- Ramp: 5'-0" long
- Three wheel platform
- Wheel freeing device
- Upgrade to 30,000# capacity

ALL UNITS ARE SUBJECT TO CHANGE AND MODIFICATIONS

NOTE: Dimensions may change without notice.

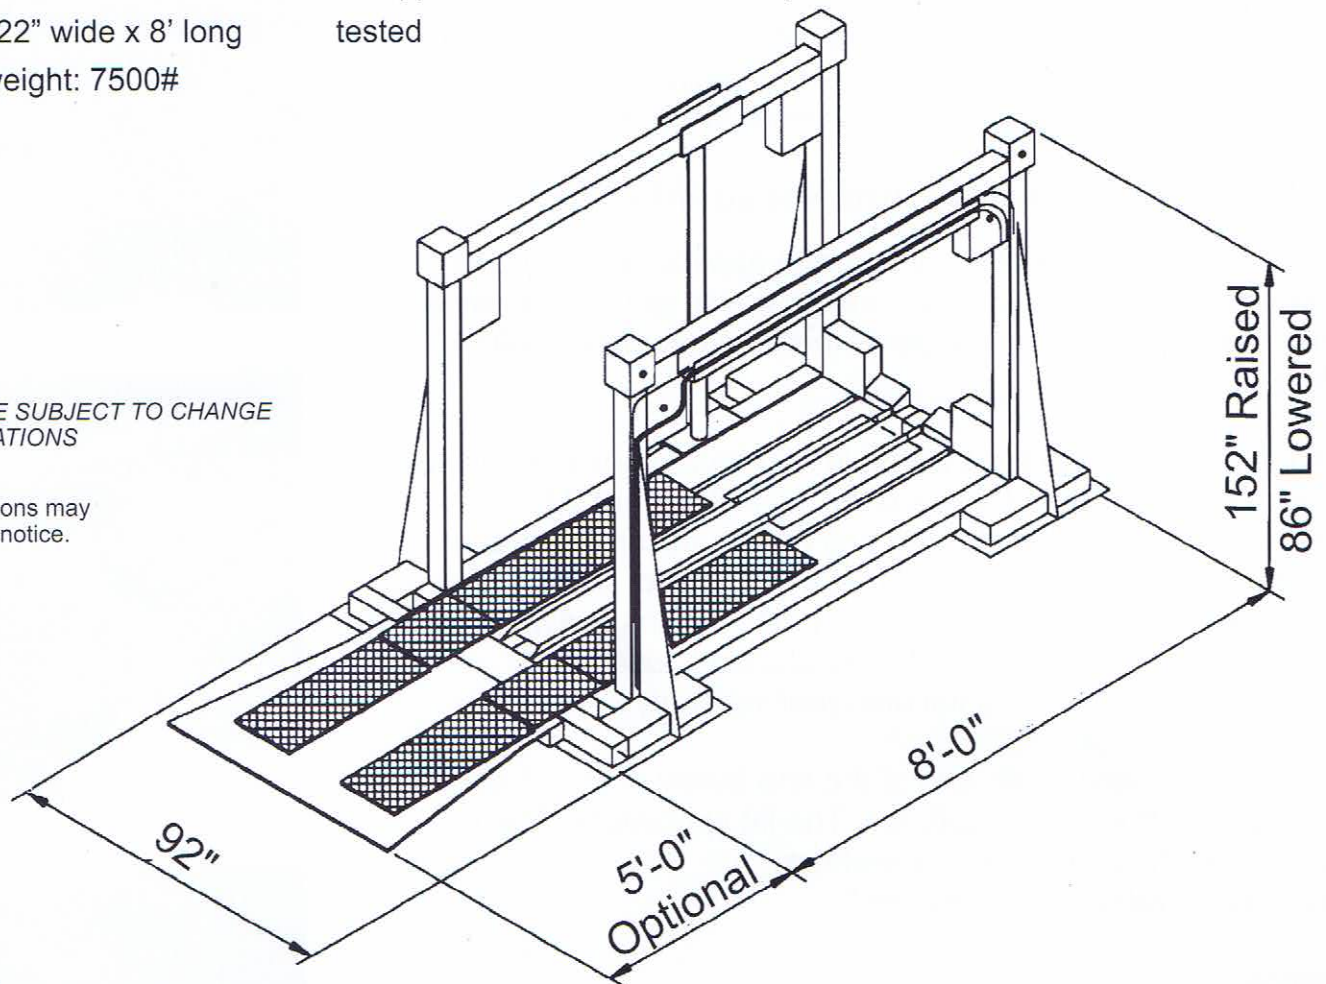

Manufacturers of
Forklift Maintenance Lifts



V-25-AF10 Lift-A-Lift®

Forklift Service Lift

**Fast, Safe and Easy Maintenance for
Forklifts • Industrial Vehicles • Light Trucks**

Tilt-Or-Lift, Inc., the leading designer of specialty lifts since 1973, has raised the art of forklift maintenance to new heights with the Lift-A-Lift® forklift service lift.

The Lift-A-Lift service lift model V-25-AF10 is designed to allow complete access to underside parts of forklifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. Just drive the vehicle onto the 22 inch wide runways. The self-leveling lift raises the vehicle up to 72" so all service and maintenance can be done while standing.

High Marks for Safety and Versatility

The Lift-A-Lift service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.

The Lift-A-Lift service lift is portable and has removable runway panels and floor beam for easier access. Standard 22 inch wide runways and 66 inch wide entry width accommodate a wide range of vehicles. This lift has a capacity of 25,000 or 30,000 pounds. A wide variety of popular options is available to enhance its versatility. All lifts are shipped assembled, factory tested and carry a full one-year warranty.

The Lift-A-Lift service lift; one of the fine family of forklift service lifts available from Tilt-Or-Lift, Inc. The lift specialists. There are no finer lifts available — anywhere.

"We stand under our products."



**Manufacturers of
Forklift Maintenance Lifts**



Phone: 419-867-3560
www.taylormhc.com

V-25-AF10 Lift-A-Lift® Forklift Service Lift

Specifications

- Capacity: 25,000# G.V.W.
- Entry width: 64"
- Minimum ceiling height: 12'7"
- Max runway height: 72"
- Safety locks are automatic
- Motor: 5 horsepower
- Power: 230/460/3/60
- Runways: 22" wide x 10' long
- Shipping weight: 8000#

Features


- Portable, hydraulic lift
- Auto safety locks
- Auto self-leveling system
- Removable runway panels
- Removable right-side floor beam
- Lockable control panels
- Shipped assembled and factory tested

Options

- Hydraulic motor/transmission jack
- Ramp: 5'-0" long
- Three wheel platform
- Wheel freeing device
- Upgrade to 30,000# capacity

ALL UNITS ARE SUBJECT TO CHANGE AND MODIFICATIONS

NOTE: Dimensions may change without notice.

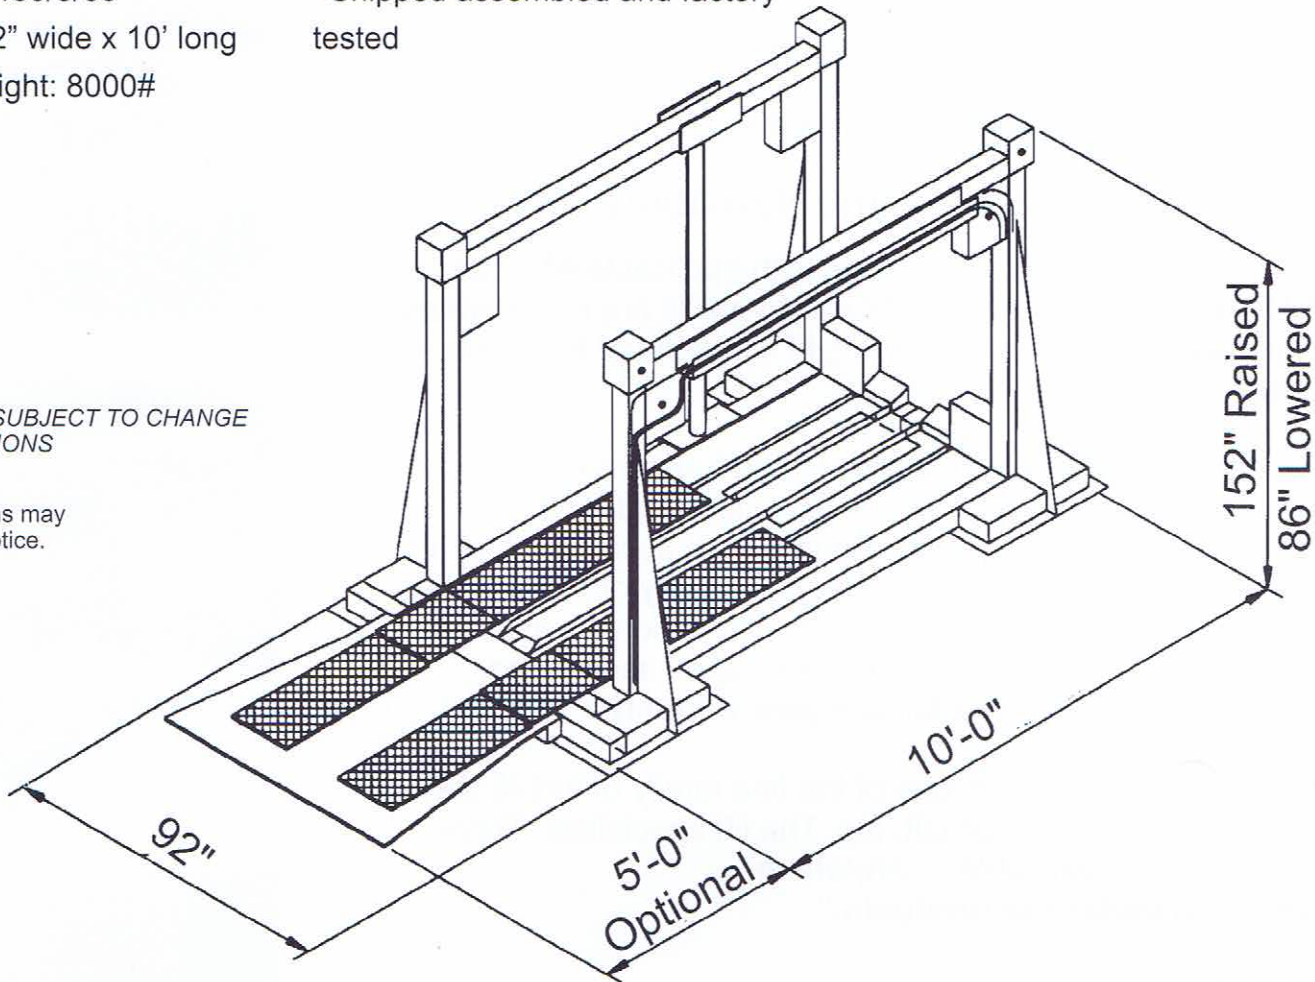



Taylor
LIFT
INCORPORATED

Manufacturers of
Forklift Maintenance Lifts



TAYLOR
MATERIAL HANDLING & CONVEYOR
Phone: 419-867-3560
www.taylormhc.com

V-25-AF12 Lift-A-Lift®

Forklift Service Lift

**Fast, Safe and Easy Maintenance for
Forklifts • Industrial Vehicles • Light Trucks**

Tilt-Or-Lift, Inc., the leading designer of specialty lifts since 1973, has raised the art of forklift maintenance to new heights with the Lift-A-Lift® forklift service lift.

The Lift-A-Lift service lift model V-25-AF12 is designed to allow complete access to underside parts of forklifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. Just drive the vehicle onto the 22 inch wide runways. The self-leveling lift raises the vehicle up to 72" so all service and maintenance can be done while standing.

High Marks for Safety and Versatility

The Lift-A-Lift service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.

The Lift-A-Lift service lift is portable and has removable runway panels and floor beam for easier access. Standard 22 inch wide runways and 66 inch wide entry width accommodate a wide range of vehicles. This lift has a capacity of 25,000 or 30,000 pounds. A wide variety of popular options is available to enhance its versatility. All lifts are shipped assembled, factory tested and carry a full one-year warranty.

The Lift-A-Lift service lift; one of the fine family of forklift service lifts available from Tilt-Or-Lift, Inc. The lift specialists. There are no finer lifts available — anywhere.

"We stand under our products."



**Manufacturers of
Forklift Maintenance Lifts**



V-25-AF12 Lift-A-Lift® Forklift Service Lift

Specifications

- Capacity: 25,000# G.V.W.
- Entry width: 64"
- Minimum ceiling height: 12'-7"
- Max runway height: 72"
- Safety locks are automatic
- Motor: 5 horsepower
- Power: 230/460/3/60
- Runways: 22" wide x 12' long
- Shipping weight: 8500#

Features


- Portable, hydraulic lift
- Auto safety locks
- Auto self-leveling system
- Removable runway panels
- Removable right-side floor beam
- Lockable control panels
- Shipped assembled and factory tested

Options

- Hydraulic motor/transmission jack
- Ramp: 5'-0" long
- Three wheel platform
- Wheel freeing device
- Upgrade to 30,000# capacity

ALL UNITS ARE SUBJECT TO CHANGE AND MODIFICATIONS

NOTE: Dimensions may change without notice.

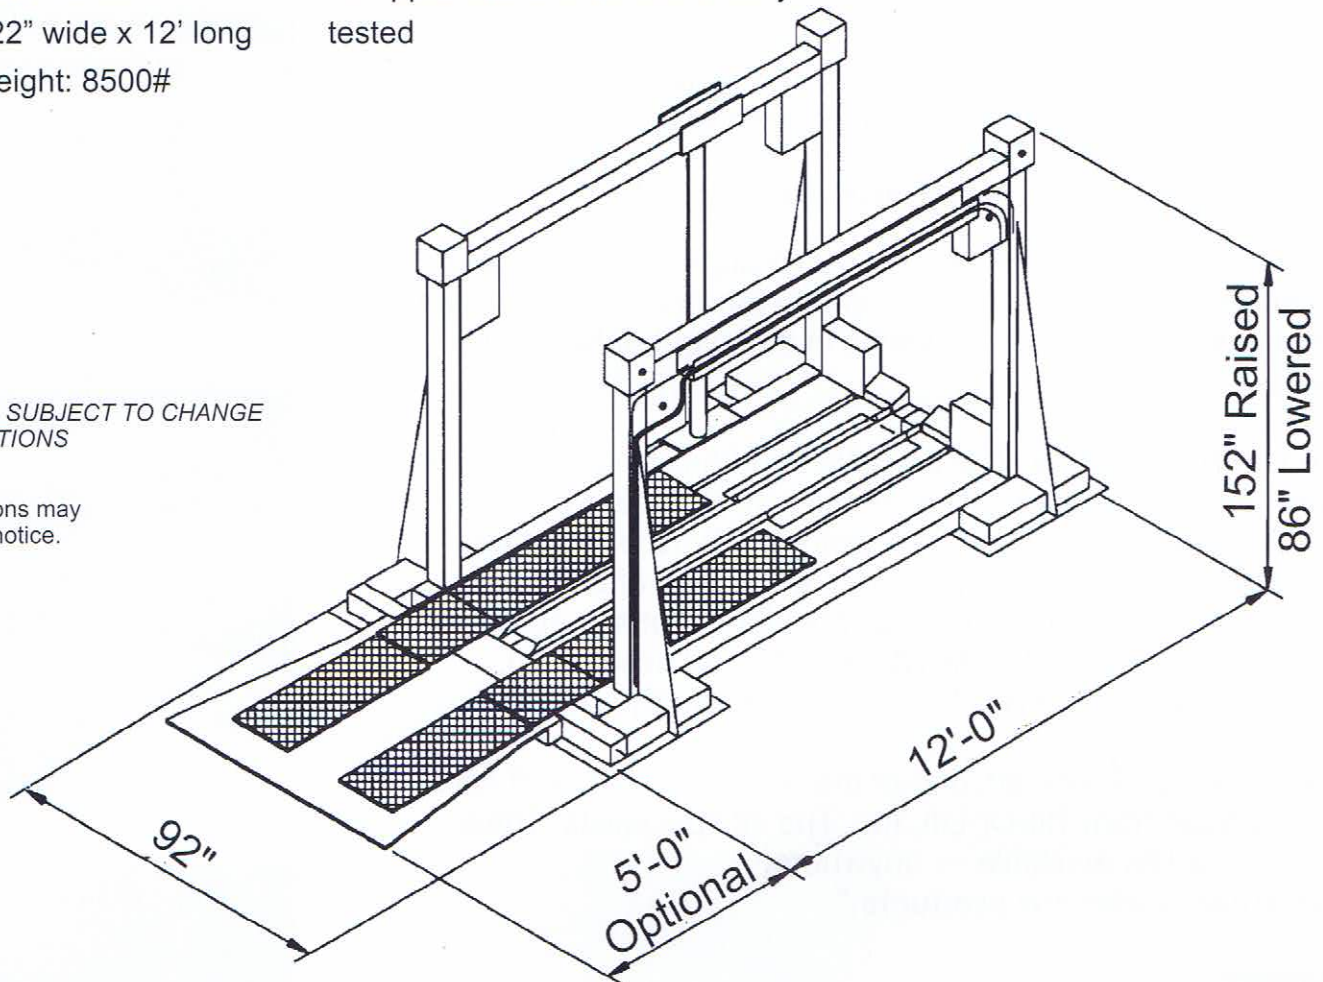

Manufacturers of
Forklift Maintenance Lifts



Lift-A-Lift® Fork Lift Service Lift

Fast, Safe and Easy Maintenance for Fork Lifts • Industrial Vehicles • Light Trucks

Tilt-or-Lift, Inc., the leading designer of specialty lifts for over 20 years, has raised the art of fork lift maintenance to new heights with the *Lift-A-Lift*® fork lift service lift.

The *Lift-A-Lift* service lift is designed to allow complete access to underside parts of fork lifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. Just drive the vehicle onto the adjustable runways. The self-leveling lift raises the vehicle up to 72 inches, so all maintenance can be performed while standing.

High Marks for Safety and Versatility

The *Lift-A-Lift* service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.

The *Lift-A-Lift* service lift is portable and has removable runway panels and floor beam for easier access. Standard 18 inches wide runways adjust hydraulically from 56 to 76 inches (outside dimension) to accommodate a wide range of vehicles. The lift is available in two models; a variety of popular options is available to enhance its utility. All lifts are shipped assembled and factory tested and carry a full one-year warranty.

The *Lift-A-Lift* service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

"We stand under our products."



**Manufacturers of
Fork Lift Maintenance Lifts**



Phone: 419-867-3560
www.taylormhc.com

Lift-A-Lift® Fork Lift Service Lift

Specifications

- Capacity:
20,000 lbs. G.V.W.
(Model V-20-A)
- Minimum ceiling height: 12' 10"
- Ramp: length 5'
- Vertical travel: 72" maximum
- Safety locks: automatic
- Motor: 5 H.P.
Power: 3-phase only
- Shipping weights: (Approx.)
7300 lbs. (V-20-A)

Features

- Portable, hydraulic lift
- 20" to 40" inside working width
- Auto safety locks
- Auto self-leveling system
- 18" wide runways adjust from 56" to 76" (outside dimension)
- Removable runway panels
- Lockable control panel
- Wheel freeing device
- Shipped assembled and factory tested


Options

- Hydraulic motor/transmission jack
- Ramp - 10' long
- Pallet jack combo kit
- center ramp & 2 side rails

All units are subject to change and modifications

Note: Dimensions may change without notice.

U.S. Patent No. 4,134,501

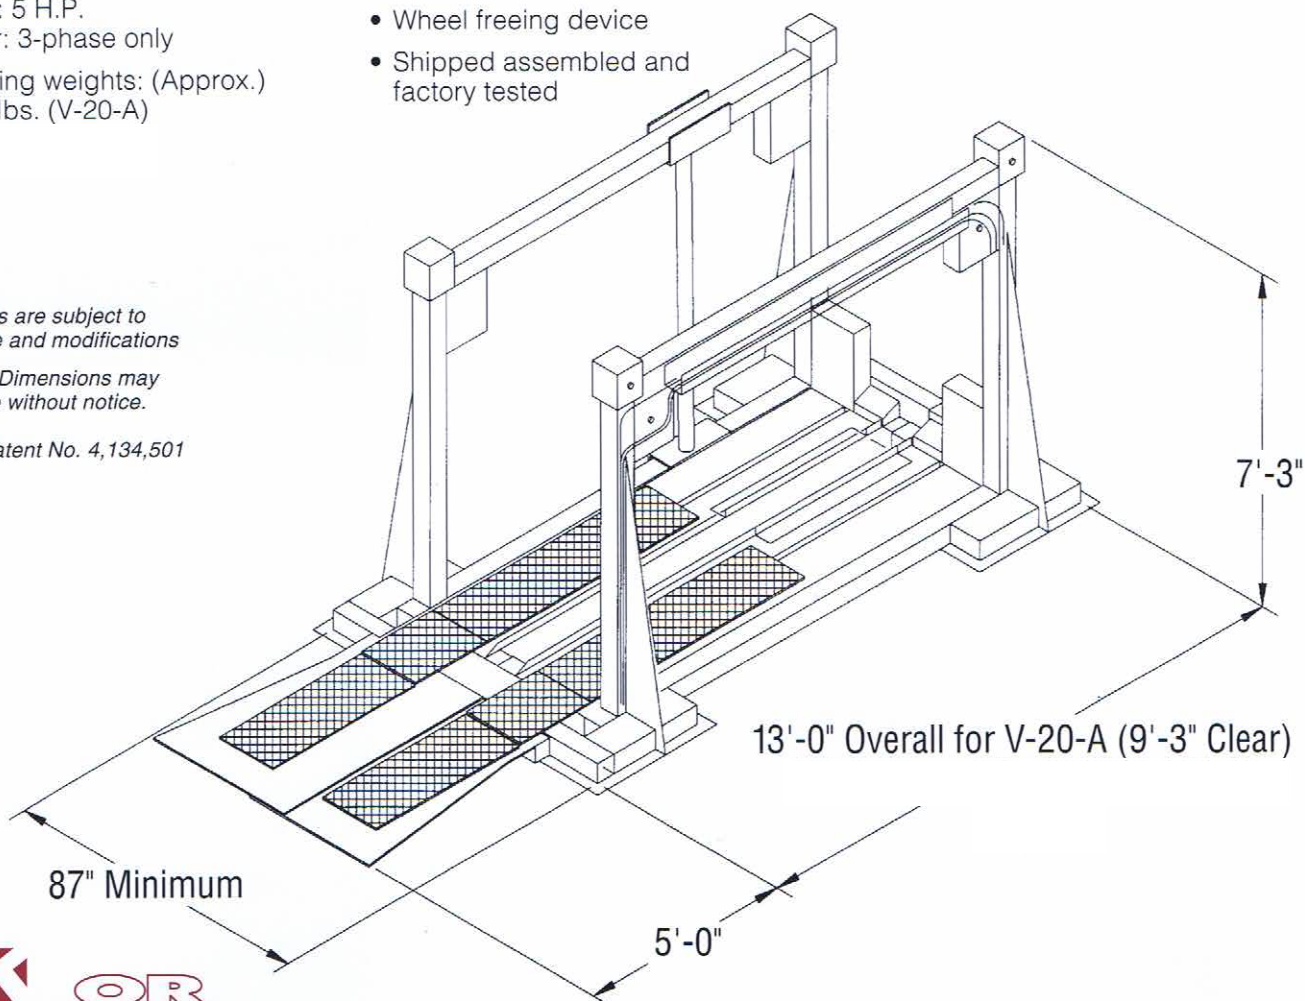

**Manufacturers of
Fork Lift Maintenance Lifts**



Lift-A-Lift® Fork Lift Service Lift

Fast, Safe and Easy Maintenance for Fork Lifts • Industrial Vehicles • Light Trucks

Tilt-or-Lift, Inc., the leading designer of specialty lifts for over 20 years, has raised the art of fork lift maintenance to new heights with the *Lift-A-Lift*® fork lift service lift.

The *Lift-A-Lift* service lift is designed to allow complete access to underside parts of fork lifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. Just drive the vehicle onto the adjustable runways. The self-leveling lift raises the vehicle up to 72 inches, so all maintenance can be performed while standing.

High Marks for Safety and Versatility

The *Lift-A-Lift* service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.

The *Lift-A-Lift* service lift is portable and has removable runway panels and floor beam for easier access. Standard 18 inches wide runways adjust hydraulically from 56 to 76 inches (outside dimension) to accommodate a wide range of vehicles. The lift is available in two models; a variety of popular options is available to enhance its utility. All lifts are shipped assembled and factory tested and carry a full one-year warranty.

The *Lift-A-Lift* service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

“We stand under our products.”



**Manufacturers of
Fork Lift Maintenance Lifts**



Phone: 419-867-3500
www.taylormhc.com

Lift-A-Lift® Fork Lift Service Lift

Specifications

- Capacity:
30,000 lbs. G.V.W.
(Model V-30-A)
- Minimum ceiling height: 12' 10"
- Ramp: length 5'
- Vertical travel: 72" maximum
- Safety locks: automatic
- Motor: 5 H.P.
Power: 3-phase only
- Shipping weights: (Approx.)
8000 lbs. (V-30-A)

*All units are subject to
change and modifications*

Note: Dimensions may
change without notice.


U.S. Patent No. 4,134,501

Features

- Portable, hydraulic lift
- 20" to 40" inside
working width
- Auto safety locks
- Auto self-leveling system
- 18" wide runways adjust from
56" to 76" (outside dimension)
- Removable runway panels
- Lockable control panel
- Wheel freeing device
- Shipped assembled and
factory tested

Options

- Hydraulic motor/transmission
jack
- Ramp - 10' long
- Pallet jack combo kit
- center ramp & 2 side rails

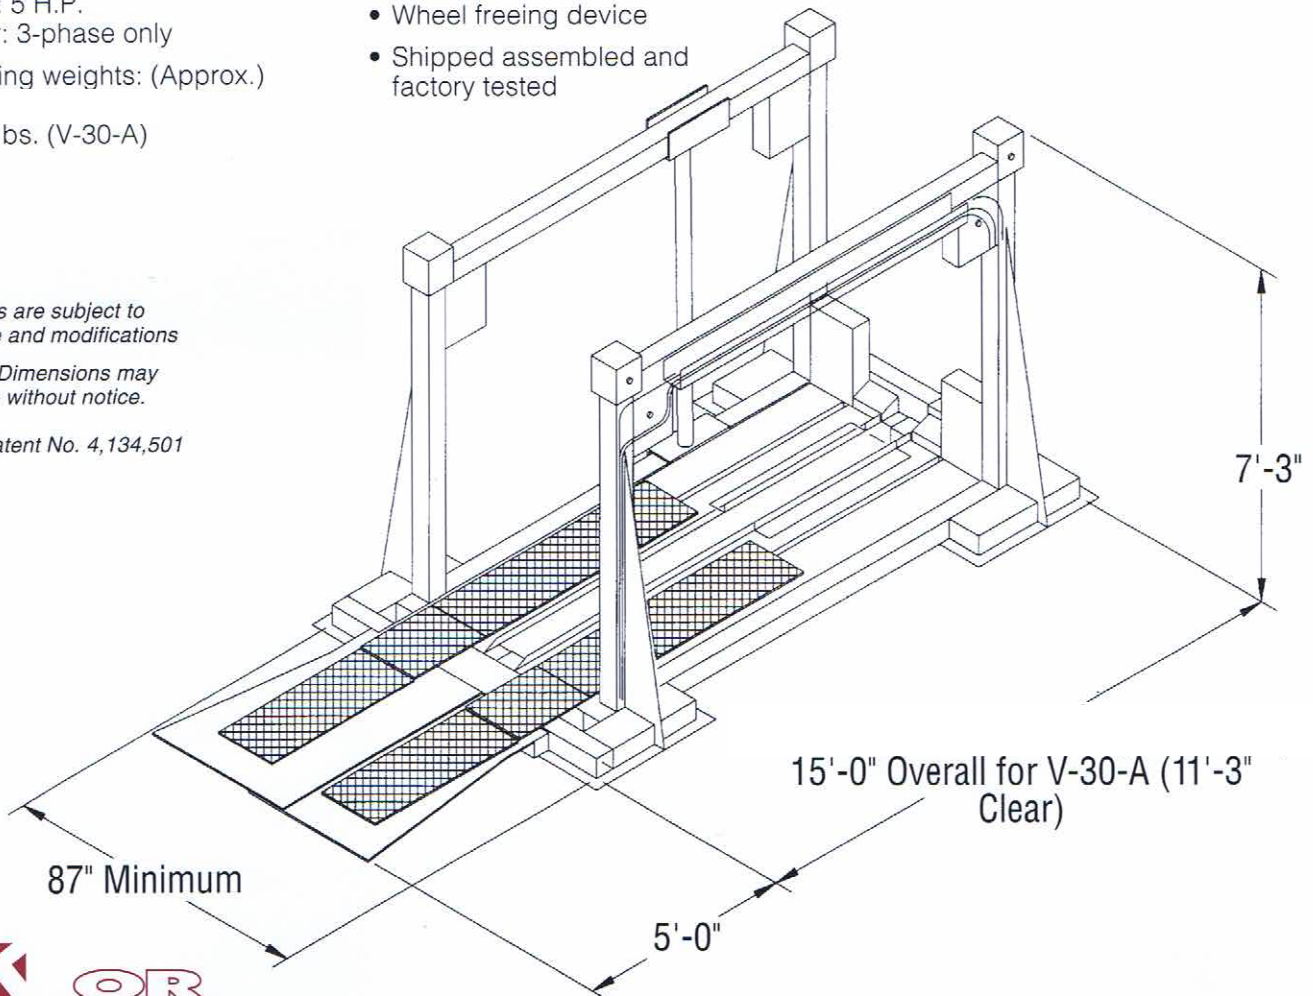

**Manufacturers of
Fork Lift Maintenance Lifts**



Lift-A-Lift® Fork Lift Service Lift

Fast, Safe and Easy Maintenance for Fork Lifts • Industrial Vehicles • Light Trucks

Tilt-or-Lift, Inc., the leading designer of specialty lifts for over 20 years, has raised the art of fork lift maintenance to new heights with the *Lift-A-Lift*® fork lift service lift.

The *Lift-A-Lift* service lift is designed to allow complete access to underside parts of fork lifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. Just drive the vehicle onto the adjustable runways. The self-leveling lift raises the vehicle up to 72 inches, so all maintenance can be performed while standing.

High Marks for Safety and Versatility

The *Lift-A-Lift* service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.

The *Lift-A-Lift* service lift is portable and has removable runway panels and floor beam for easier access. Standard 18 inches wide runways adjust hydraulically from 56 to 76 inches (outside dimension) to accommodate a wide range of vehicles. The lift is available in two models; a variety of popular options is available to enhance its utility. All lifts are shipped assembled and factory tested and carry a full one-year warranty.

The *Lift-A-Lift* service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

“We stand under our products.”



**Manufacturers of
Fork Lift Maintenance Lifts**



Phone: 419-867-3560
www.taylormhc.com

Lift-A-Lift® Fork Lift Service Lift

Specifications

- Capacity:

30,000 lbs. G.V.W.
(Model V-30-A RLS)
- Minimum ceiling height: 12' 10"
- Ramp: length 5'
- Vertical travel: 72" maximum
- Safety locks: automatic
- Motor: 5 H.P.
Power: 3-phase only
- Shipping weights: (Approx.)

8900 lbs. (V-30ARLS)

*All units are subject to
change and modifications*

Note: Dimensions may
change without notice.


U.S. Patent No. 4,134,501

Features

- Portable, hydraulic lift
- 20" to 40" inside
working width
- Auto safety locks
- Auto self-leveling system
- 18" wide runways adjust from
56" to 76" (outside dimension)
- Removable runway panels
- Lockable control panel
- Wheel freeing device
- Shipped assembled and
factory tested

Options

- Hydraulic motor/transmission
jack
- Runway - 16' Lg.
- Photo Eye System
- Three Wheel Platform
- Center Stand

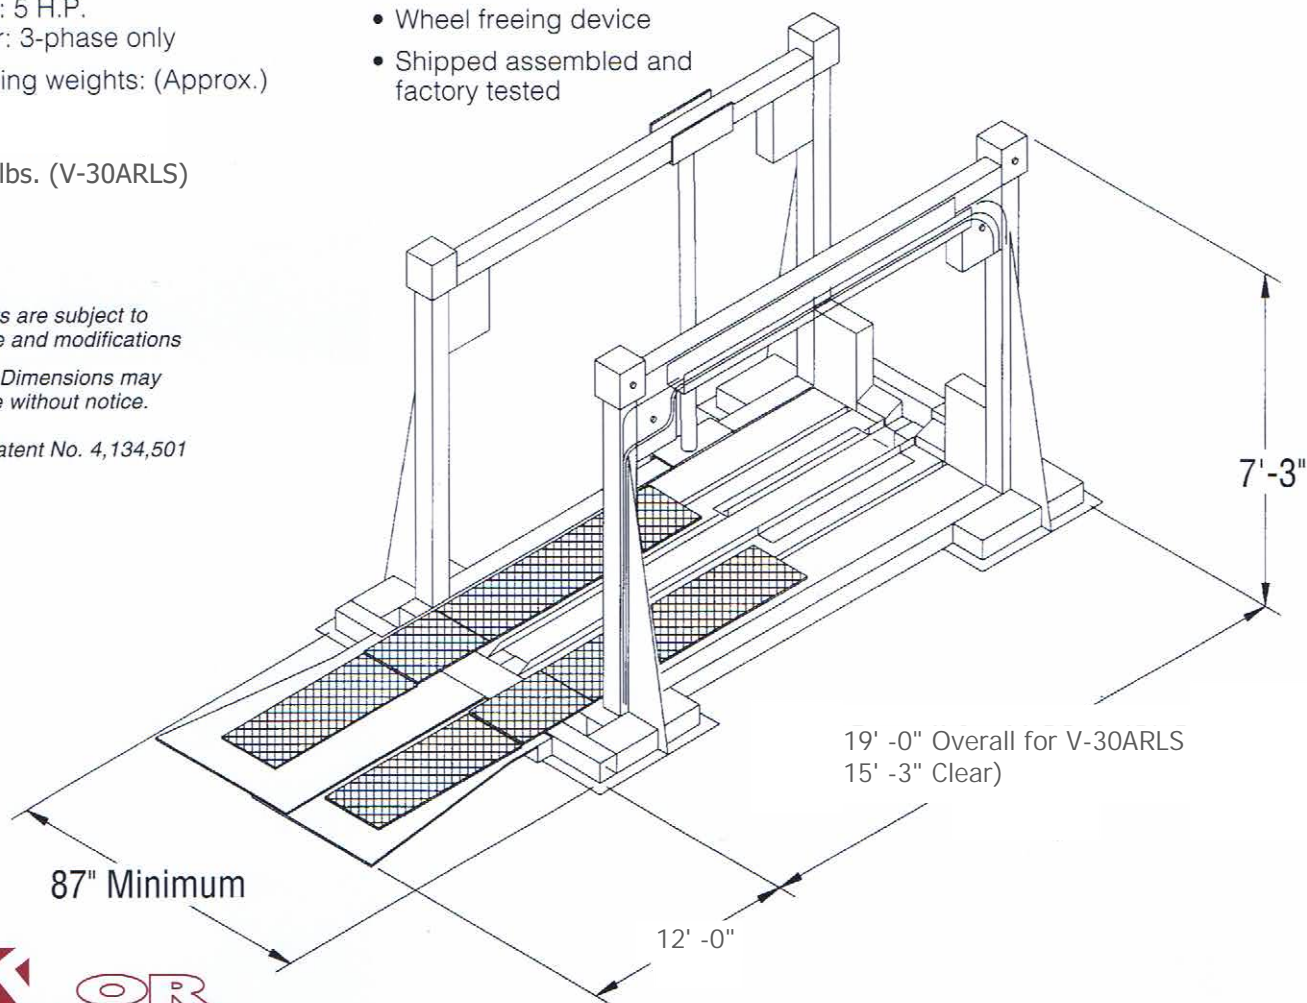

**Manufacturers of
Fork Lift Maintenance Lifts**



Lift-A-Lift® Fork Lift Service Lift

Fast, Safe and Easy Maintenance for Fork Lifts • Industrial Vehicles • Light Trucks

Tilt-or-Lift, Inc., the leading designer of specialty lifts for over 20 years, has raised the art of fork lift maintenance to new heights with the *Lift-A-Lift*® fork lift service lift.

The *Lift-A-Lift* service lift is designed to allow complete access to underside parts of fork lifts, industrial trucks and motor vehicles for lubrication, repair or part replacement. Just drive the vehicle onto the adjustable runways. The self-leveling lift raises the vehicle up to 72 inches, so all maintenance can be performed while standing.

High Marks for Safety and Versatility

The *Lift-A-Lift* service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure.

The *Lift-A-Lift* service lift is portable and has removable runway panels and floor beam for easier access. Standard 18 inches wide runways adjust hydraulically from 56 to 76 inches (outside dimension) to accommodate a wide range of vehicles. The lift is available in two models; a variety of popular options is available to enhance its utility. All lifts are shipped assembled and factory tested and carry a full one-year warranty.

The *Lift-A-Lift* service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

“We stand under our products.”



**Manufacturers of
Fork Lift Maintenance Lifts**



Phone: 419-867-3560
www.taylormhc.com

Lift-A-Lift® Fork Lift Service Lift

Specifications

- Capacity:
40,000 lbs. G.V.W.
(Model V-40AWS)
- Minimum ceiling height: 12' 10"
- Ramp: length 5'
- Vertical travel: 72" maximum
- Safety locks: automatic
- Motor: 5 H.P.
Power: 3-phase only
- Shipping weights: (Approx.)
8000 lbs. (V-40AWS)

Features

- Portable, hydraulic lift
- 20" to 40" inside working width
- Auto safety locks
- Auto self-leveling system
- 18" wide runways adjust from 56" to 76" (outside dimension)
- Removable runway panels
- Lockable control panel
- Wheel freeing device
- Shipped assembled and factory tested


Options

- Hydraulic motor/transmission jack
- Ramp - 10' long
- Pallet jack combo kit
- center ramp & 2 side rails

All units are subject to change and modifications

Note: Dimensions may change without notice.

U.S. Patent No. 4,134,501

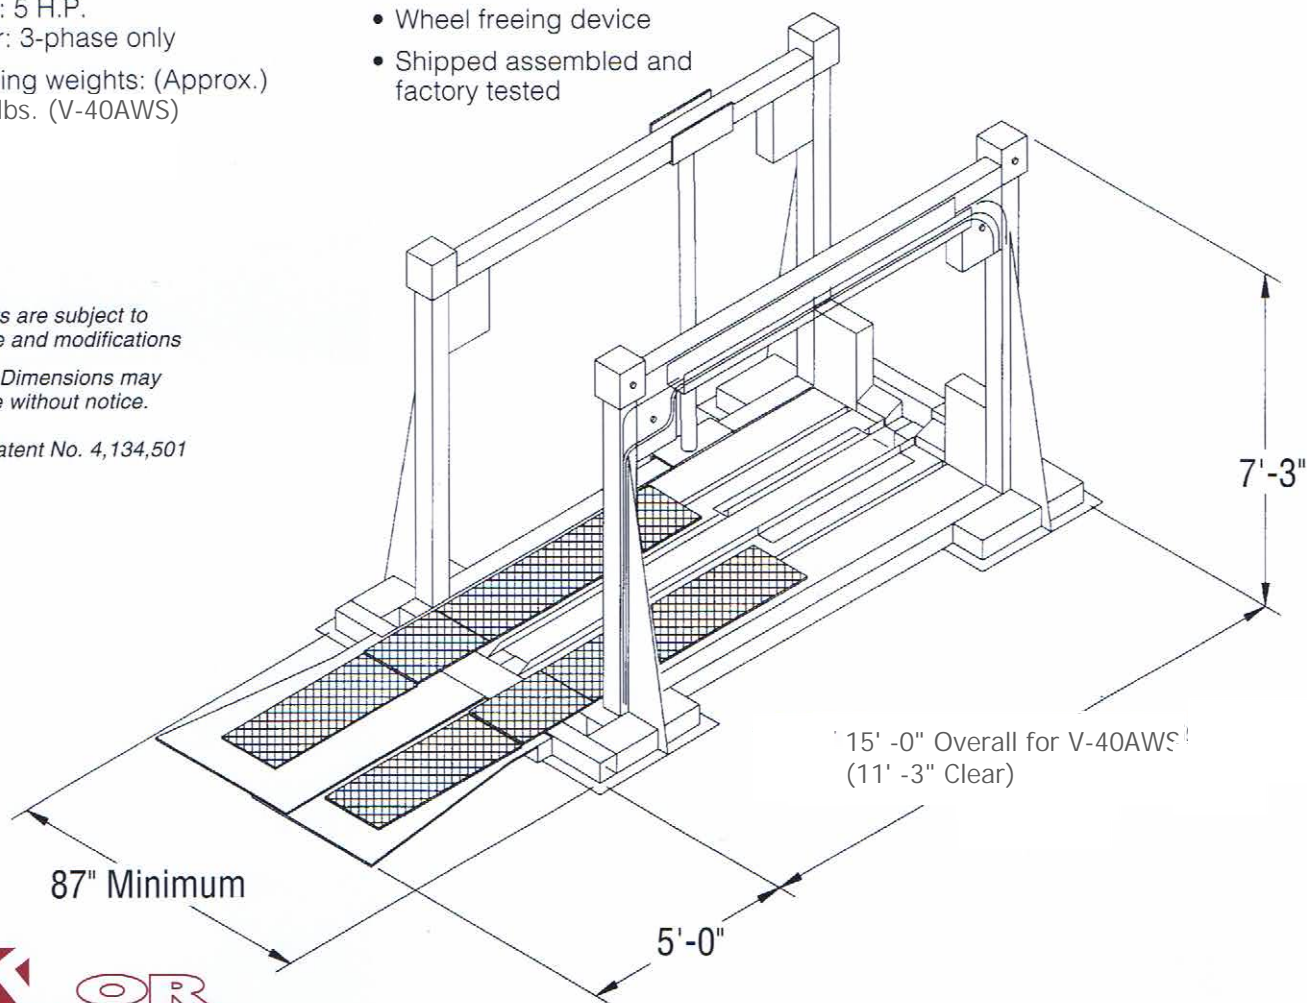

**Manufacturers of
Fork Lift Maintenance Lifts**



Phone: 419-867-3560
www.taylormhc.com

Tilt-A-Lift® Fork Lift Lifter

Fast, Safe and Easy Maintenance for Fork Lift Trucks

Tilt-or-Lift, Inc., the leading designer of specialty lifts for over 20 years, has taken a different angle in designing an effective industrial maintenance lift. The result: the patented *Tilt-A-Lift*® fork lift service lift.

The *Tilt-A-Lift* service lift simplifies maintenance and repair of fork lifts and other short-wheelbase industrial vehicles. Just set the width of the portable unit to the required distance and drive the vehicle onto the loading ramp and into position. The *Tilt-A-Lift* service lift raises the vehicle as much as 60 degrees from horizontal using no cables, chains or worm screws and allows easy access to underside parts for lubrication, repair or part replacement.


A New Level of Safety and Versatility

The *Tilt-A-Lift* service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure. The lift is equally safe for the fork lift, since the vehicle is being raised by its wheels as recommended by manufacturers.

The *Tilt-A-Lift* service lift is portable and has removable runway panels for easy access to underside parts. All lifts are shipped assembled and factory tested and carry a full one-year warranty. A variety of popular options is available to increase the lift's versatility.

The *Tilt-A-Lift* service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

"We stand under our products."

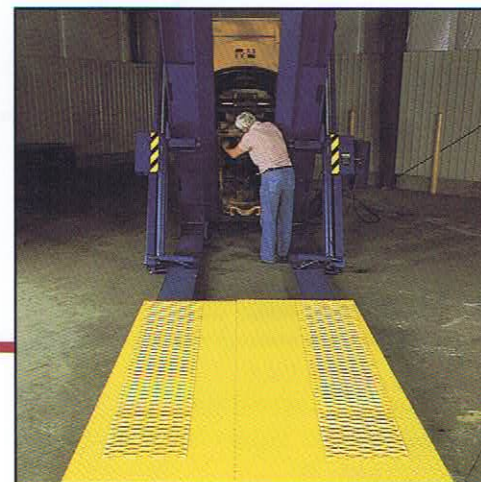

**Manufacturers of
Fork Lift Maintenance Lifts**



Phone: 419-867-3560
www.taylormhc.com

Tilt-A-Lift® Fork Lift Lifter

Specifications

Model S-15-A

- Capacity: 15,000 lbs. G.V.W.
- Lift beam length: 7'3"
- Lift width: 52" to 66"
- Max. tilt angle: 60 degrees
- Motor: 1.5 HP, Power: 3 phase
- Shipping weight: 4500 lbs.

Features

- Portable hydraulic lift
- 18" runways adjust from 52" to 66" (outside dimension)
- Automatic safety locks
- Lockable control panel
- Removable runway panels
- Shipped assembled and factory tested


Options

- Wheel freeing device
- Center ramp kit - for 3-wheel trucks
- Ramp - 10'-0" long

All units are subject to change and modifications

Note: Dimensions may change without notice.

U.S. Patent No. 4,134,501

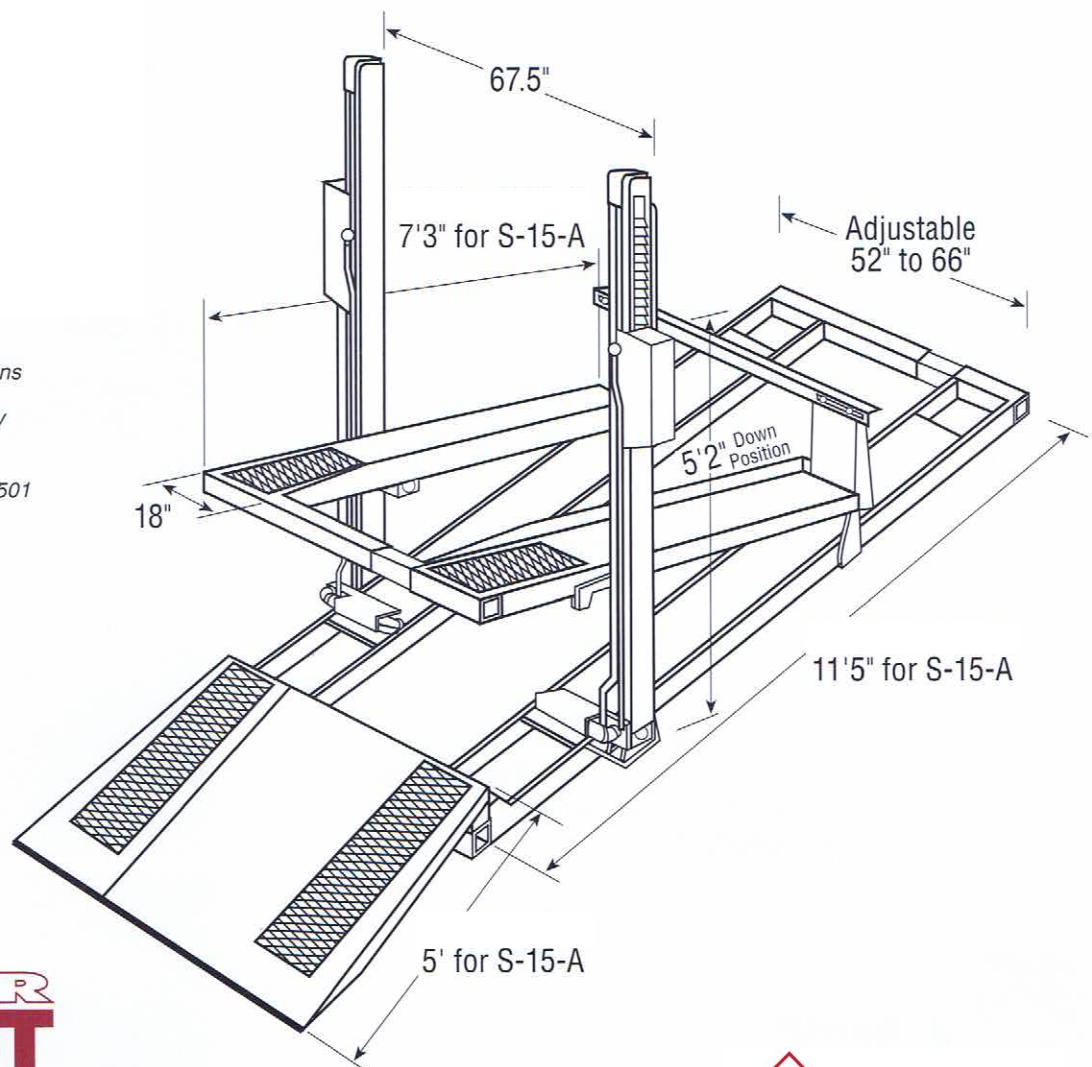

**Manufacturers of
Fork Lift Maintenance Lifts**



Tilt-A-Lift® Fork Lift Lifter

Fast, Safe and Easy Maintenance for Fork Lift Trucks

Tilt-or-Lift, Inc., the leading designer of specialty lifts for over 20 years, has taken a different angle in designing an effective industrial maintenance lift. The result: the patented *Tilt-A-Lift*® fork lift service lift.

The *Tilt-A-Lift* service lift simplifies maintenance and repair of fork lifts and other short-wheelbase industrial vehicles. Just set the width of the portable unit to the required distance and drive the vehicle onto the loading ramp and into position. The *Tilt-A-Lift* service lift raises the vehicle as much as 60 degrees from horizontal using no cables, chains or worm screws and allows easy access to underside parts for lubrication, repair or part replacement.


A New Level of Safety and Versatility

The *Tilt-A-Lift* service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure. The lift is equally safe for the fork lift, since the vehicle is being raised by its wheels as recommended by manufacturers.

The *Tilt-A-Lift* service lift is portable and has removable runway panels for easy access to underside parts. All lifts are shipped assembled and factory tested and carry a full one-year warranty. A variety of popular options is available to increase the lift's versatility.

The *Tilt-A-Lift* service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

"We stand under our products."

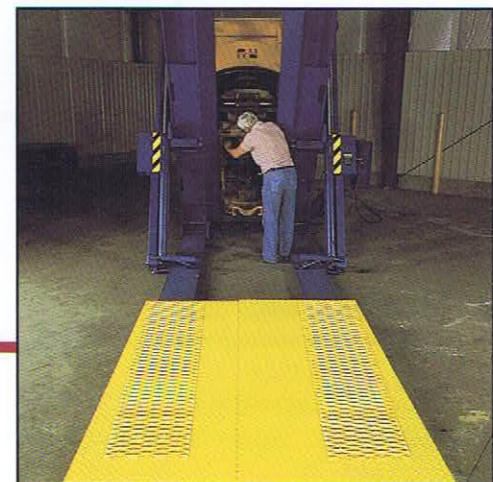

**Manufacturers of
Fork Lift Maintenance Lifts**



Phone: 419-867-3560
www.taylormhc.com

Tilt-A-Lift® Fork Lift Lifter

Specifications

Model C-25-A

- Capacity: 25,000 lbs. G.V.W.
- Lift beam length: 9'3"
- Lift width: 52" to 66"
- Max. tilt angle: 60 degrees
- Motor: 3 HP, Power: 3 phase
- Shipping weight: 5500 lbs

All units are subject to change and modifications

Note: Dimensions may change without notice.


U.S. Patent No. 4,134,501

Features

- Portable hydraulic lift
- 18" runways adjust from 52" to 66" (outside dimension)
- Automatic safety locks
- Lockable control panel
- Removable runway panels
- Shipped assembled and factory tested

Options

- Wheel freeing device
- Center ramp kit - for 3-wheel trucks
- Ramp - 10'-0" long

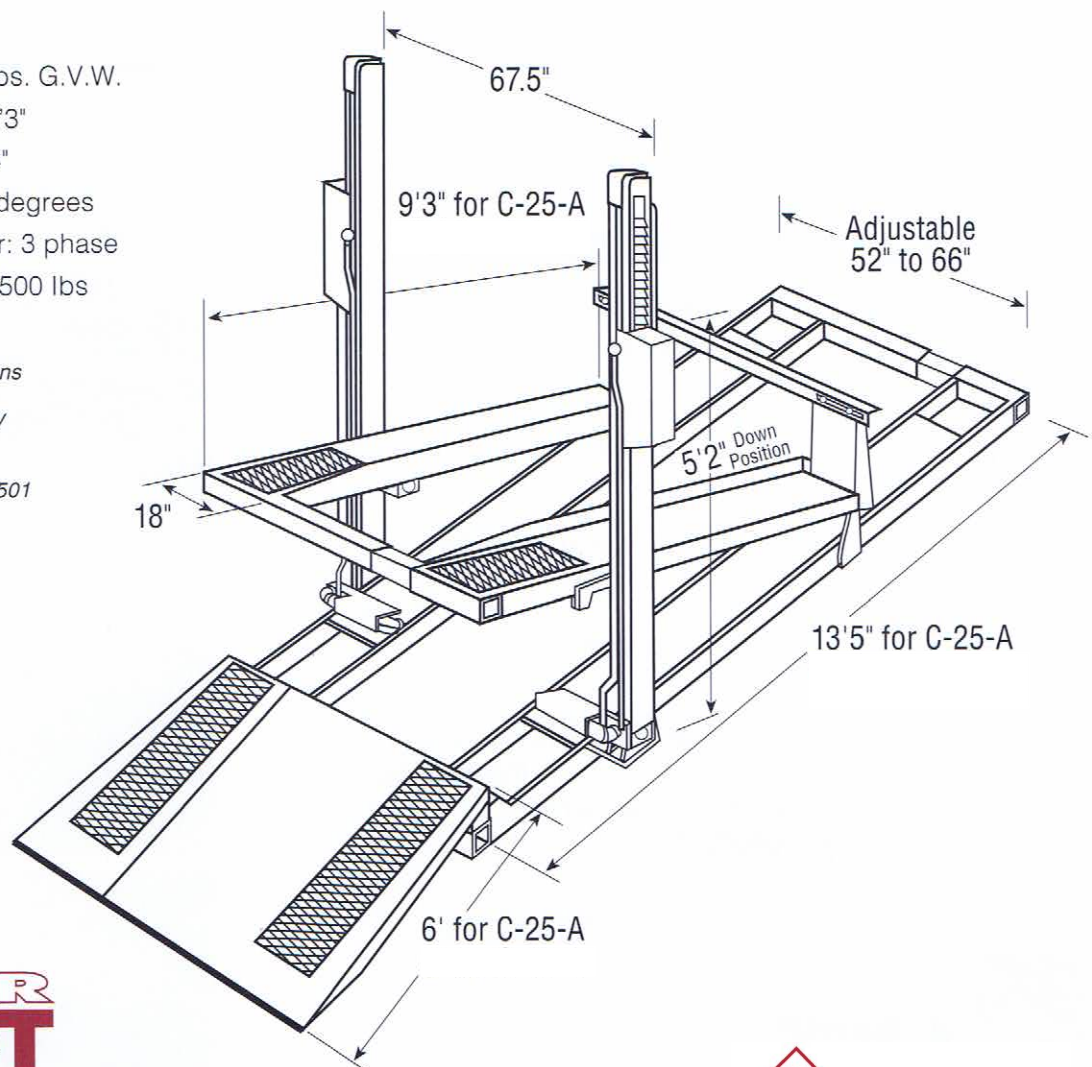

**Manufacturers of
Fork Lift Maintenance Lifts**



Tilt-Or-Lift's New Portable Forklift Maintenance Lift!

The Ultimate in Safety and Portability

Does your company have facilities at multiple locations? Our new portable V-13-AAPS Port-A-Lift™ was designed with your needs in mind. It pulls easily to your maintenance facilities and is ready for service in minutes.

Even in the Corner of the Back Lot


No more worries about how to get that uncooperative forklift from the back lot to the repair bay. Instead, take the repair bay to the forklift with the portable Port-A-Lift. Once in position, just remove the wheels and fenders, lower the lift to the ground and you are ready.

No electrical service is needed to use this lift. The unit is powered by a generator using propane gas. It can be used in remote areas of your facility. Now that's portable!

Most of Tilt-or-Lift's standard features are available on this tidy, portable unit. It has a maximum gross vehicle weight (lifting) capacity of 13,000 pounds, automatic safety locks, an automatic leveling system and a maximum runway height of 71".

It is delivered factory tested with a one-year warranty. The V-13-AAPS Port-A-Lift is one of the fine family of forklift service lifts available from Tilt-or-Lift, Inc. – the lift specialists.

There Are No Finer Lifts Available – Anywhere.
"We stand under our products."

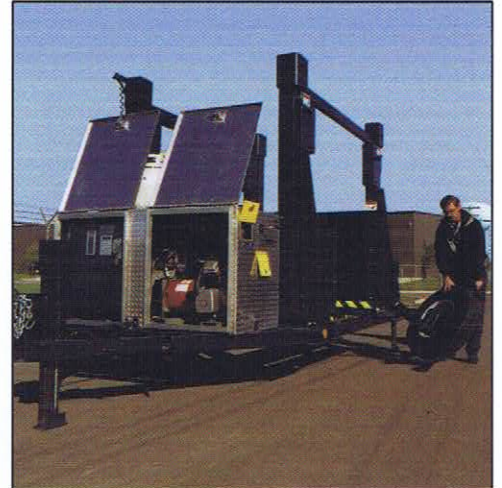

TILT-OR-LIFT
INCORPORATED
Manufacturers of
Fork Lift Maintenance Lifts

TAYLOR
MATERIAL HANDLING & CONVEYOR
Phone: 419-867-3560
www.taylormhc.com

Port-A-Lift™ Forklift Service Lift

Specifications

- Capacity: 13,000 lbs. GVW
- Entry width: 52"
- Minimum ceiling height: 12' 7"
- Ramp: 4' long, aluminum diamond plate, hinged
- Max runway height: 71"
- Motor: 3 hp
- Power: 220V/1/60
- Generator: 18 hp, LP gas powered, 12V electric start, 8000 continuous watts @ 3600 R.P.M., with (1) 30 amp 120V twist lock and (1) 30 amp 240V twist lock.
- All utilities mounted in enclosure made of aluminum diamond plate
- Shipping weight: 6100 lbs.
- Tongue weight: 880 lbs.

All units are subject to change and modifications

Note: Dimensions may change without notice.



Patent Pending

Features

- Portable, self-contained lift
- No electrical service hook up required for operation in remote location
- Automatic safety locks at each post
- Automatic self-leveling system
- Partially removable runway panels
- Lockable control panel
- Shipped assembled and factory tested

Options

- Pallet jack combo kit (center ramp & 2 side rails)
- Wheel-freeing device
- Three-wheel platform

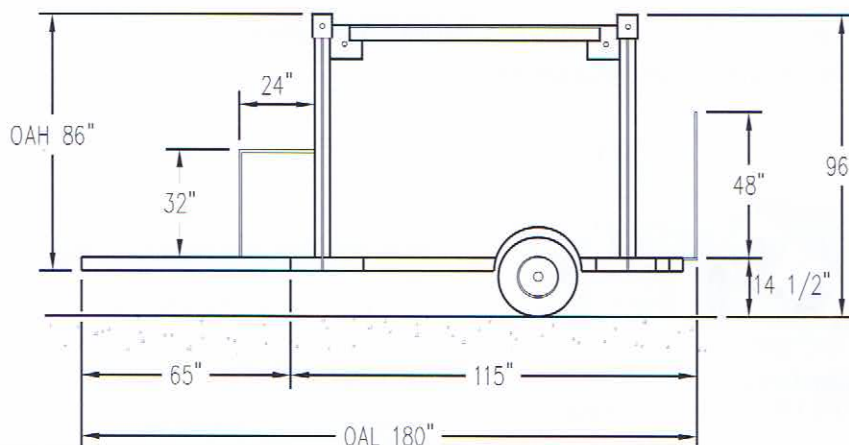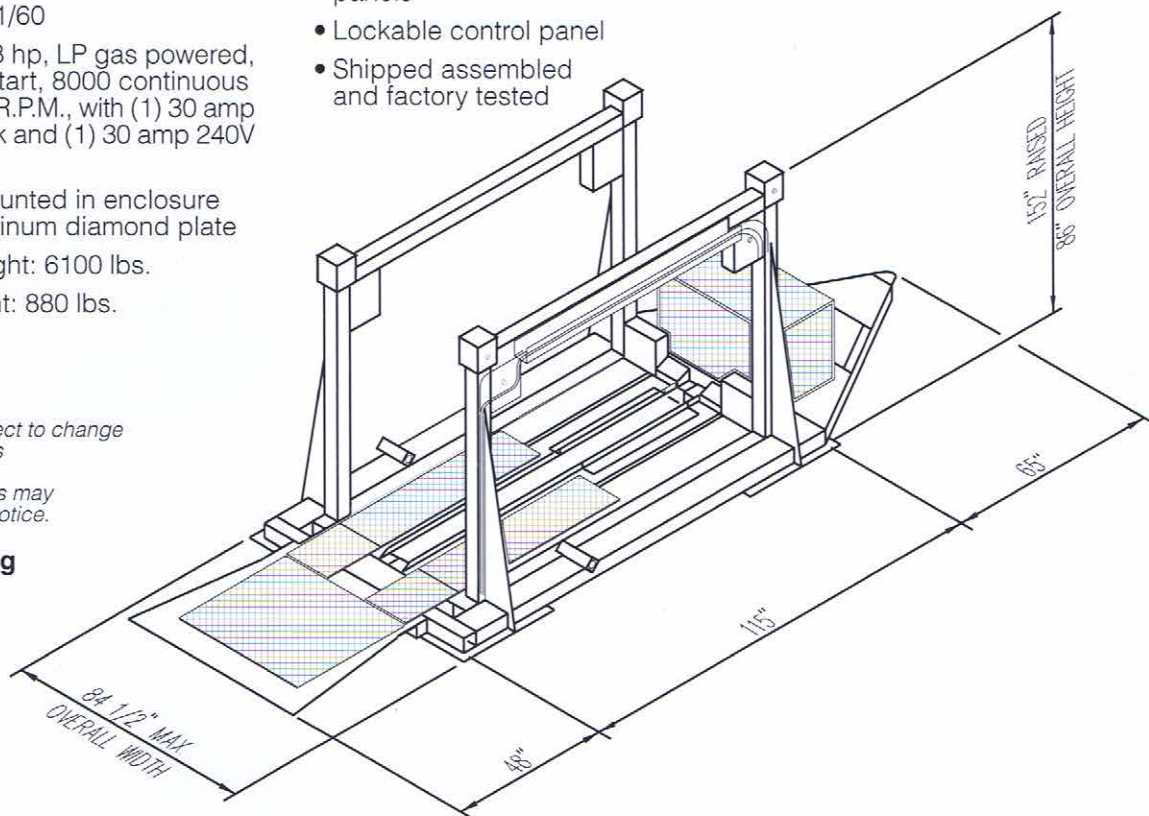

Tilter™ Service Lift

Fast, Economical and Safe Fork Lift Maintenance

Tilt-or-Lift, Inc., the leading designer of specialty lifts for over 20 years, has tilted the scales of fork lift maintenance in your favor with the new *Tilter*™ service lift.

The *Tilter* service lift is the simple and economical solution to industrial vehicle maintenance problems. Just drive the vehicle onto the adjustable *Tilter* service lift. The lift drops down automatically, allowing easy access.

The Proper Balance of Economy and Effectiveness

The *Tilter* service lift complies with applicable ANSI and OSHA requirements. It features structural steel construction and self-locking rear legs with a manual release. The front legs are permanently locked.

The economical *Tilter* service lift is portable and available in two sizes to service a wide range of industrial vehicles. All lifts have adjustable runways, are shipped assembled and factory tested, and carry a full one-year warranty. A variety of popular options is available to increase the *Tilter* service lift's versatility.

The *Tilter* service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

"We stand under our products."



**Manufacturers of
Fork Lift Maintenance Lifts**



Tilter™ Service Lift

Specifications


Model M-15

- Weight Capacity:
15,000 lb. G.V.W.
- Tread Dimensions:
17' - 0" X 61 1/2" X 19 5/8"
- Ramp Width: 12"
- Tread Width : Adjustable,
48" X 61 1/2"
- Approximate Weight: 3800 lbs.

*All units are subject to
change and modifications*

Note: Dimensions may
change without notice.

U.S. Patent Pending

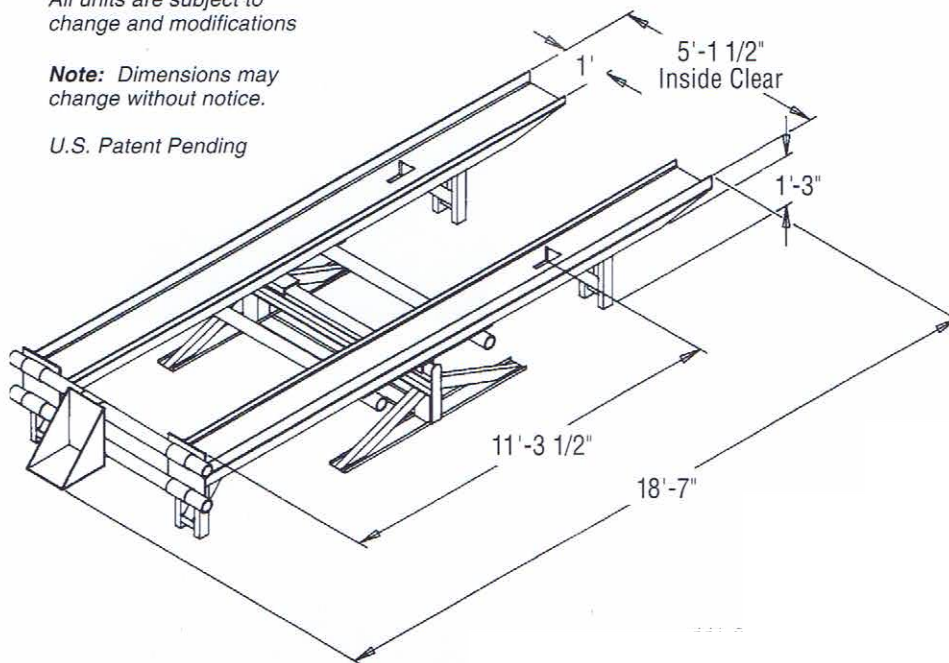

Options

- Winch
- Wheel Free Accessory
- 3-Wheel Adaptor



**Manufacturers of
Fork Lift Maintenance Lifts**



Tilter™ Service Lift

Fast, Economical and Safe Fork Lift Maintenance

Tilt-or-Lift, Inc., the leading designer of specialty lifts for over 20 years, has tilted the scales of fork lift maintenance in your favor with the new *Tilter™* service lift.

The *Tilter* service lift is the simple and economical solution to industrial vehicle maintenance problems. Just drive the vehicle onto the adjustable *Tilter* service lift. The lift drops down automatically, allowing easy access.

The Proper Balance of Economy and Effectiveness

The *Tilter* service lift complies with applicable ANSI and OSHA requirements. It features structural steel construction and self-locking rear legs with a manual release. The front legs are permanently locked.

The economical *Tilter* service lift is portable and available in two sizes to service a wide range of industrial vehicles. All lifts have adjustable runways, are shipped assembled and factory tested, and carry a full one-year warranty. A variety of popular options is available to increase the *Tilter* service lift's versatility.

The *Tilter* service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

"We stand under our products."



**Manufacturers of
Fork Lift Maintenance Lifts**



Tilter™ Service Lift

Specifications

Model M-25

- Weight Capacity:
25,000 lb. G.V.W.
- Tread Dimensions:
17' - 0" X 61 1/2" X 19 5/8"
- Ramp Width: 12"
- Tread Width Adjustable:
48" X 61 1/2"
- Approximate Weight: 4200 lbs.


Options

- Winch
- Wheel Free Accessory
- 3-Wheel Adaptor

*All units are subject to
change and modifications*

Note: Dimensions may
change without notice.

U.S. Patent Pending

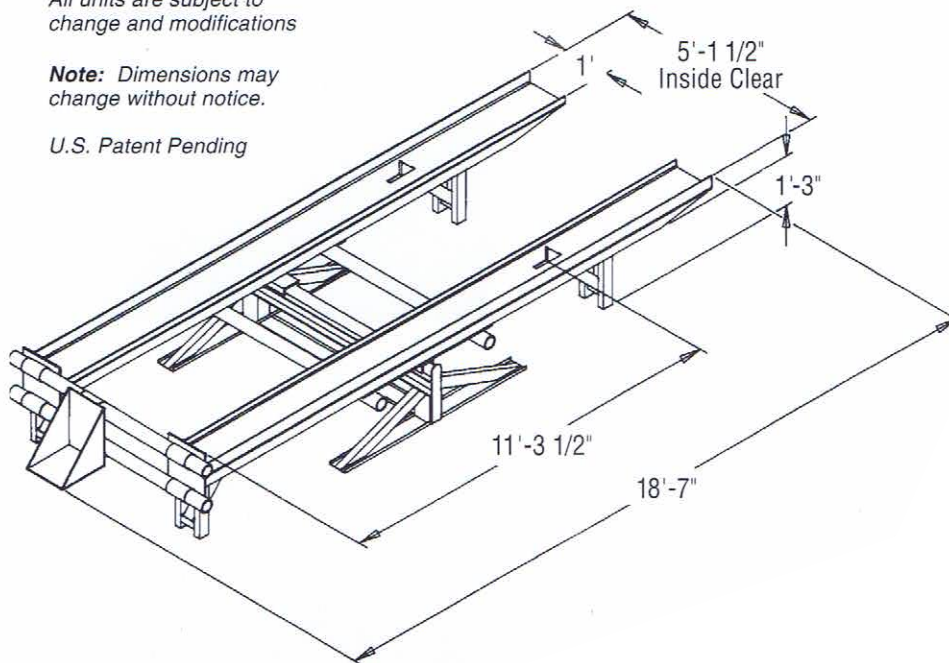

**Manufacturers of
Fork Lift Maintenance Lifts**



Tipper™ Fork Truck Service Lift

Fast, Safe and Easy Fork Lift Maintenance

Tilt-or-Lift, Inc., the leading designer of specialty lifts for over 20 years, offers a hot tip on improving fork lift maintenance...the new *Tipper*™ fork lift service lift.

This revolutionary machine tilts lift trucks a full 90 degrees, thereby, offering unobstructed access to the entire vehicle underbody. Just drive the vehicle onto the *Tipper* service lift, and let the *Tipper* service lift do the rest. Nothing could be simpler...or more cost-effective.


The "Nth" Degree of Safety and Versatility

The *Tipper* service lift complies with applicable ANSI and OSHA requirements. Automatic safety pawls are incorporated in the design to prevent accidents in the event of hydraulic failure. It requires very little floor space and is portable.

Each American-made unit is factory tested and assembled and comes with a full one-year warranty. The unit accommodates most standard-size fork lifts and has proven to save hundreds of maintenance hours per year.

The *Tipper* service lift; one of the fine family of fork lift service lifts available from Tilt-or-Lift, Inc., the lift specialists. There are no finer lifts available – anywhere.

"We stand under our products."

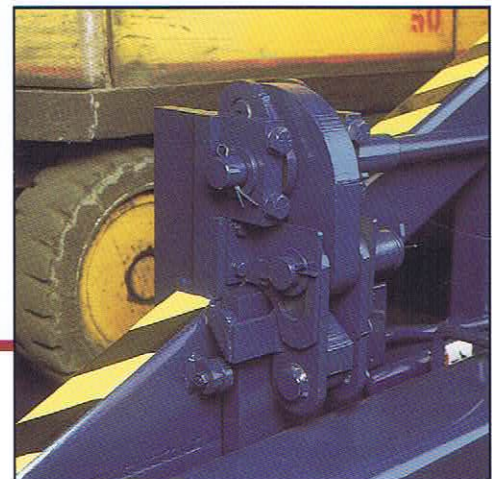

**Manufacturers of
Fork Lift Maintenance Lifts**



Tipper™ Fork Truck Service Lift

Specifications

Model 313A

- Capacity: 13,000 lbs. G.V.W. at 54 O.A. tread width
- Length Clear: 85 1/2"
- Length O.A.: 178"
- Width Clear: 65 1/2"
- Width O.A.: 89 1/2" closed working
- Max. tilt angle: 90 degrees
- Power: 230/460/3/60
- Shipping Weight: 6,500 lbs.
- Height O.A.: 103" (tipped); 61-1/2" (not tipped)


All units are subject to change and modifications

Note: Dimensions may change without notice.

U.S. Patent No. 4,966,517 and 5,478,191

Standard Features

- Automatic hydraulic safety locks
- Electrical safety interlock system
- Lockable control panel
- Safety release handle
- Shipped assembled and factory tested

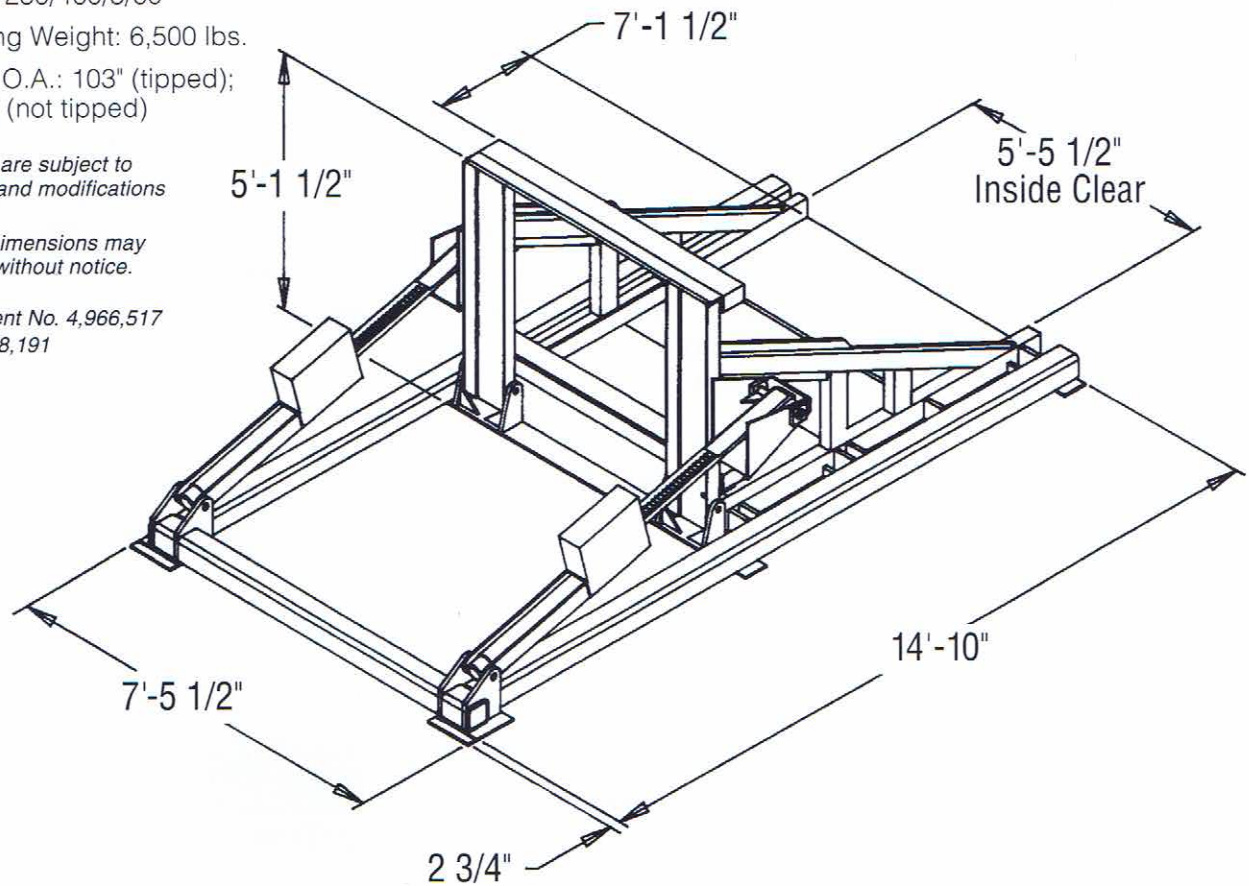

**Manufacturers of
Fork Lift Maintenance Lifts**

