



# BestReach<sup>®</sup> Telescopic Boom Conveyor

## Power Applications

You already know BEST as the leader in the expandable conveyor market. Now, with the introduction of our BestReach<sup>®</sup> Telescopic Boom conveyor, you will come to know us as the industry leader in this important market!

This conveyor extends automated loading all the way into the nose of your trailer. It's the perfect choice for high volume shipping/receiving applications.

Call today and see why more material handling professionals depend on BEST than ever before!




**STANDARD SPECIFICATIONS**

Three standard models available:

- 88' extended length (25' retracted length)
- 80' extended length (25' retracted length)
- 72' extended length (25' retracted length)

Overall Width .....	47 1/2"
Belt Width .....	24"
Base Belt Height .....	42"
Belt Speed .....	60 FPM
In & Out Speed .....	60 FPM
Capacity Per Linear Foot .....	50 lbs.
Max Capacity .....	1,500 lbs. over 30 ft.
Electrical Requirements.....	480 VAC 3 Phase
Package stop dry contact	
Safety stop on discharge end	
Electronic package stop	
E-Stop Interlocks	
Consult factory for other telescopic boom conveyor models	

**Reach from your permanent conveyor all the way into your trailers with ease!**

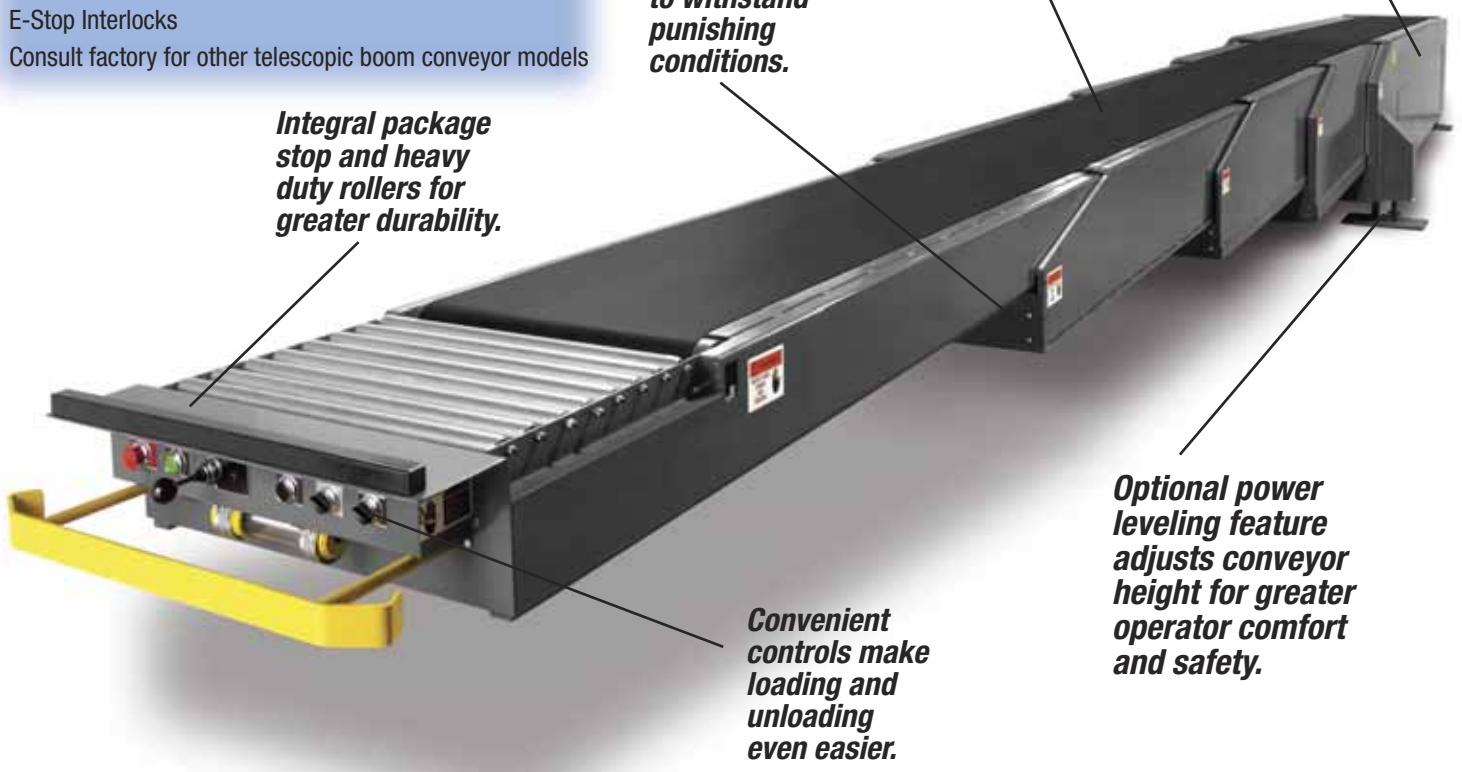

*Integral package stop and heavy duty rollers for greater durability.*

*Heavy duty construction from end to end to withstand punishing conditions.*

*Reinforced rubber belt for extended life.*

*Stores out of the way under your permanent conveyor when not in use.*

*Optional power leveling feature adjusts conveyor height for greater operator comfort and safety.*

*Convenient controls make loading and unloading even easier.*

**PERFORMANCE OPTIONS**

- Power Leveling - Hydraulic/Screw
- Electronic Indexing
- Variable Belt Speed 60-135 FPM
- Light at Discharge End
- Fan at Discharge End
- 240 VAC 3 Phase
- Raised Belt Transfer
- Tilt & Non-Tilt Traversing

