



Specifications:

- Flat and Cleated Belt models
- Loads up to 60 lbs* (27 kg)
- Belt speeds up to 264 ft/min (81 m/min)
- Belt widths: 1.75" (44 mm) to 18" (457 mm)
- Conveyor lengths: 2' (610 mm) to 18' (8,486 mm)
- Cleats available from 0.43" (1 mm) to 2.36" (60 mm) high
- 11 gauge stainless steel roll formed frame
- Complete stainless steel construction
- 1.25" (32 mm) diameter drive pulley turns approximately 4.25" (108 mm) of belt per revolution
- 1.5" (38 mm) bottom of frame to top of belt
- Self-aligning stainless steel sealed bearings with FDA approved solid lubricant
- Washdown rated gearmotors and controls
- CE models available



* Conveyor load capacity depends on conveyor size, incline, motor position, accumulated loads and other factors.

Features & Benefits:

- Quick five-minute belt change for increased uptime
- Rack and pinion for fast single point belt tensioning
- 304 stainless steel frame, head and tail plates are polished to a #4 finish
- V-Groove frame with guided belt ensures accurate tracking
- Wedge-Lok™ system for impact protection
- Streamlined design fits where other conveyors do not
- Low profile, single piece frame for quick, easy cleaning
- Quick-clamp rail for easy mounting of bolt-on accessories
- Optional 0.25" (6 mm) thick bottom wiper for Flat Belt End Drives
- A variety of FDA approved belting to meet application needs




Soap & Water
Cleaners





Chlorinated Cleaners




AQUAGARD® 7200 & 7300 SERIES



7200

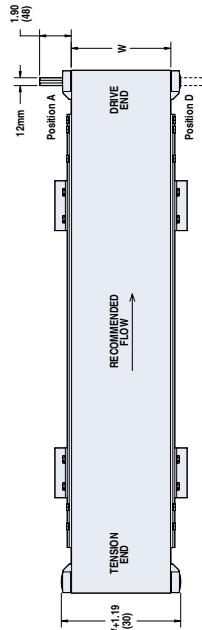

7300

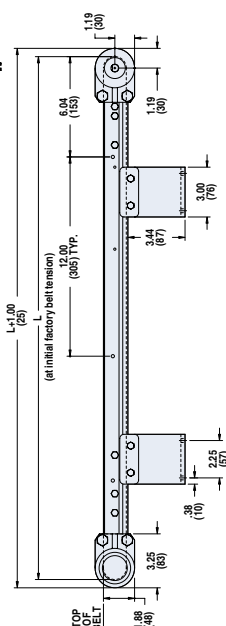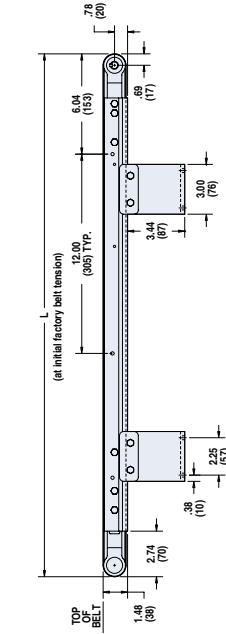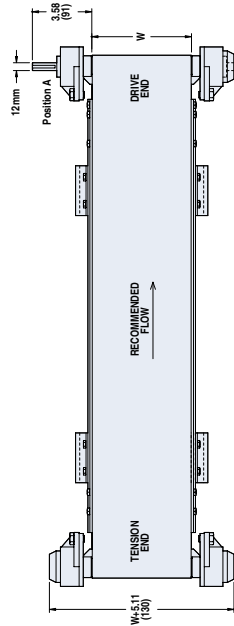

W = Conveyor Belt Width Dim = in (mm)

STANDARD MODELS




Flat Belt End Drive




Cleated Belt End Drive

STANDARD OPTIONS

Optional Bottom Wiper

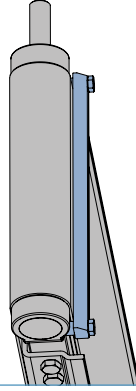

Optional Tool-less Belt Change Handles for Quick Belt Release

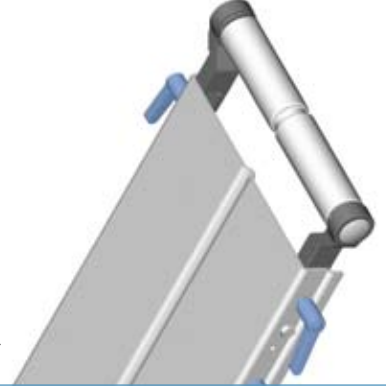

For more information, go to www.dorner.com. Call 800.397.8664 or 262.367.7600.

Due to the wide variety of drive set ups and applications, point of installation guarding is the responsibility of the end user.