



# MODEL 770 Slat Conveyors

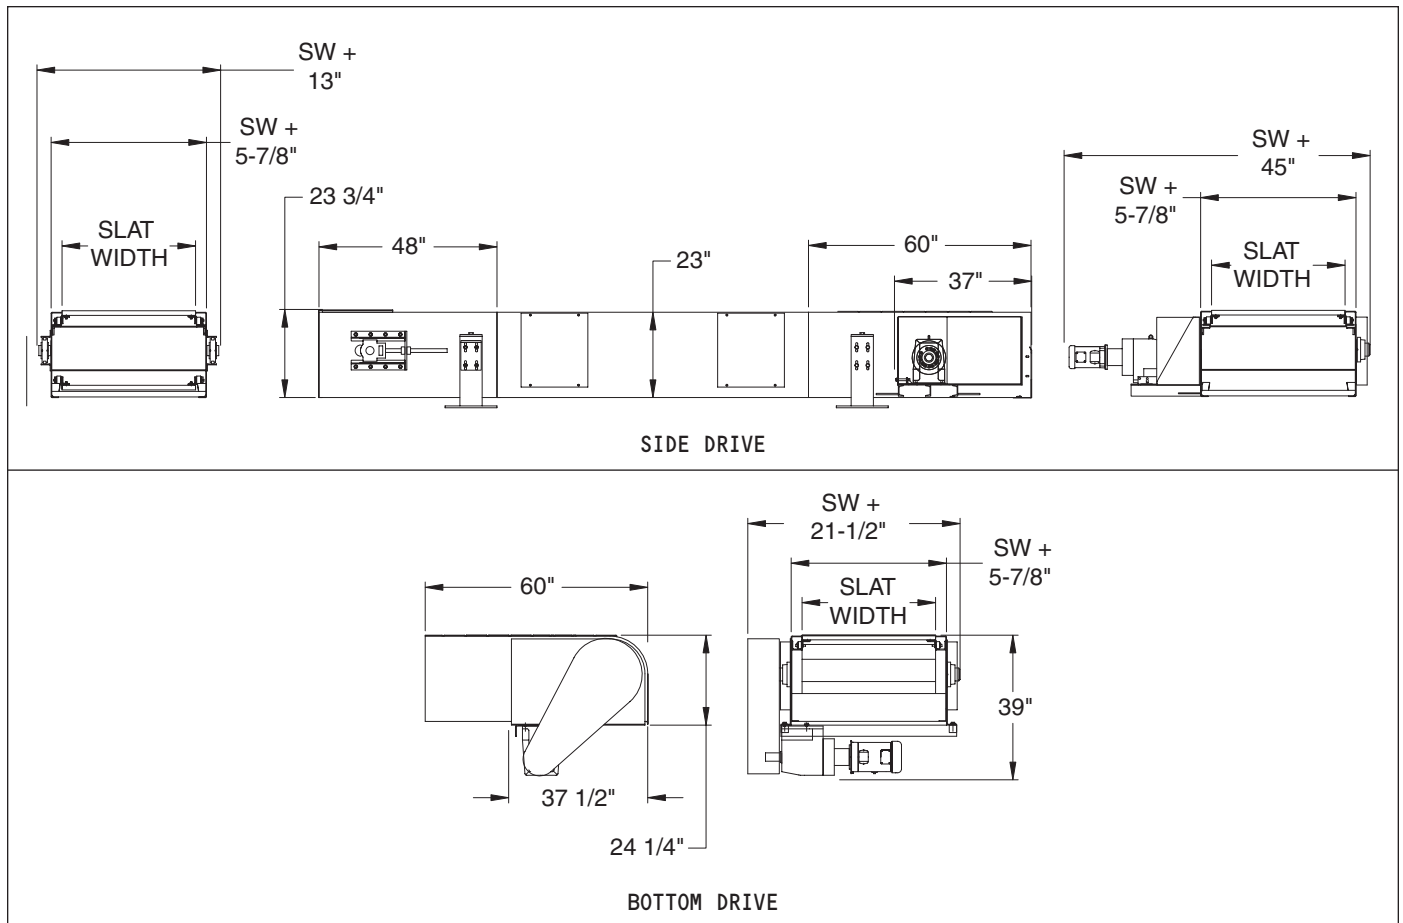

These units are commonly used in assembly line operations where product moves at a slow rate of speed through several operator work stations. The slats are made of formed 7 gauge steel, 5-7/8" wide x 1-1/2" deep on 6" centers. The strength of the individual slats is ideally suited to convey larger and heavier products like washing machines, furniture and larger automobile parts.

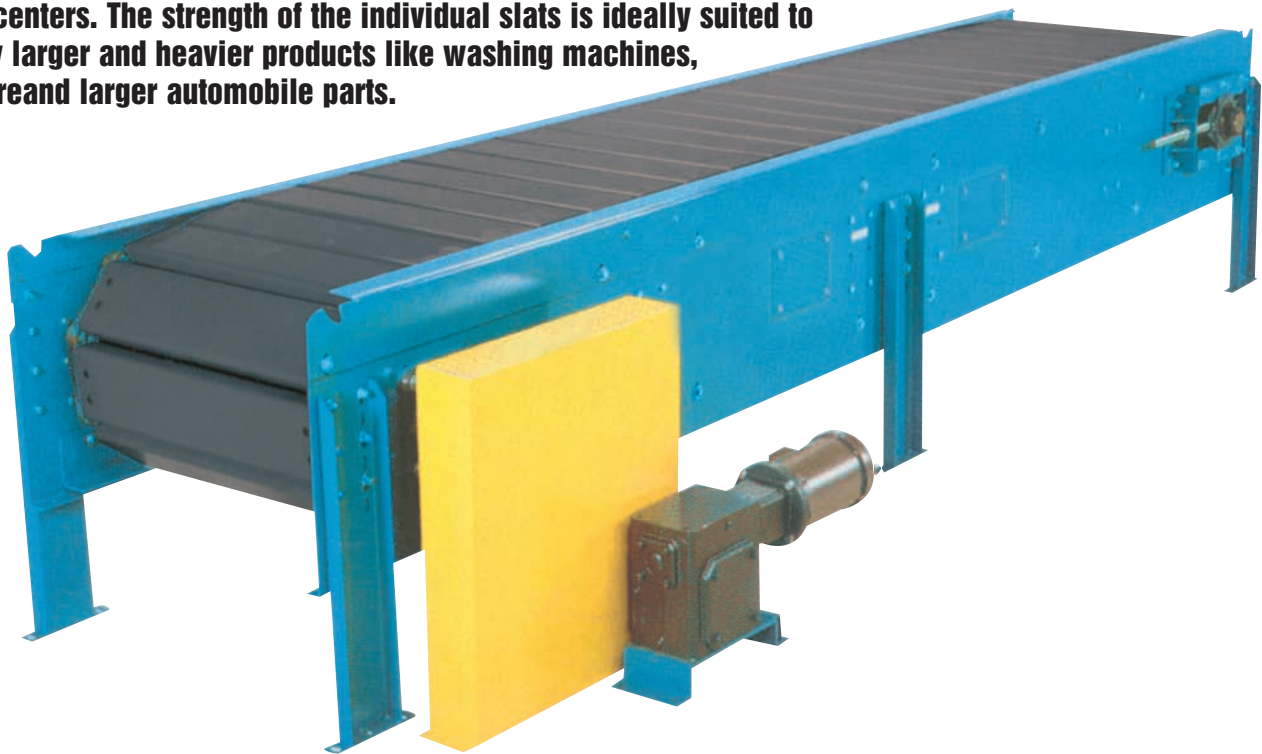

# MODEL 770 Slat Conveyors



## Standard Specifications

**Frame:** 7 gauge x 23" deep

**Slats:** 7 gauge x 5-7/8" wide x 1-1/2" on 6" centers (unpainted)

**Standard Speed:** 30 FPM

**Standard Drive:** Side Mount Drive

**Supports:** Heavy Duty – Structural Channel

## Slat Conveyors Comparison Chart

**Slat Conveyors** — Slat conveyors are ideally suited to convey larger and heavier products like washing machines and larger automobile parts

MODEL	DESCRIPTION	FRAME GAUGE	FRAME DEPTH	DRIVER SIZE	DRIVER TYPE	DRIVE SHAFT DIA.	IDLER SIZE	IDLER TYPE	IDLER SHAFT DIA.	STANDARD CARRIER	STD. DRIVE	OTHER
770	Slat conveyor	7	23"	8 tooth	15.68" pd	2.9375"	8 tooth	15.68"	2.1875"	5-7/8" x 1-1/2" x 7 ga.	Side	Suitable for heavy loads

## Unit Weights (Shipping Weights – lbs.)

PER APPLICATION – CONTACT NLE

## Skid Dimensions

CONTACT NLE FOR SKID DIMENSIONS



1700 Division Street • New London, WI 54961  
800-437-1994 • 920-982-4030 • fax: 920-982-6800 • www.nleco.com