



Fixed Product End Stops

End Stops - Allows product to stop at the end of a conveyor line. Fixed and adjustable end stops are available.

Adjustable End Stop - Formed or structural steel adjustable end stop bolted to the conveyor frame with manually adjusted stop positions. Height is not adjustable.

Fixed End Stop - Structural channel bolted or welded to the end of the conveyor with optional structural angle reinforcement. Fixed end stops can include fork cut outs for loading and unloading.

Back Stop - Fixed or Adjustable back stop allows for easy product positioning when loading.



FIXED END STOP



ADJUSTABLE END STOP
END STOPS



BACK STOP




FIXED END STOPS



ADJUSTABLE END STOPS
END STOPS

PRODUCT STOPS ANGLE AND ROLLER STOPS

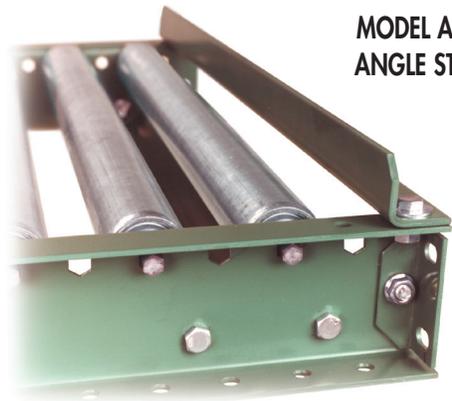

**MODEL ASM
ANGLE STOP**

Both angle and roller stops serve as an economical means to stopping goods at a given fixed point. "BR" brackets or angle stop quickly attaches to conveyor frame top flange.

ANGLE STOPS MODEL NUMBER ASM-33

AS (light, medium or heavy duty*)-(between frames**)
*Specify L for light duty, M for medium duty or H for heavy duty.

**Specify OAW for model ASL, available in 12", 18" and 24" OAW only and is suited specifically for wheel conveyors and 138 gravity series.

ROLLER STOPS MODEL NUMBER BR-196S-21

BR-(roller type*)-(between frames)
*Specify 138G, 196S, 196G, 192S, 199S, 254S, 251S or 297S.

SPECIFICATIONS

ANGLE STOP: Model ASL for light duty and ASM for medium duty applications (1-1/2" x 1-1/2" x 10 ga.); Model ASH for heavy duty applications (1-1/2" x 1-1/2" x 7 ga.).

ROLLER STOP: Includes pair of brackets and roller as specified in model number.

WIDTHS: Medium and heavy duty 24 hour shipments include 13", 15", 17", 19", 21", 23", 25", 27", 31", 33", 37", 39", 43", 45", 47" and 51" BF; light duty available in 12", 18" and 24" OAW.



**MODEL BR
ROLLER STOP**

■ 24 hour shipment

BUTT END STOPS



Butt end stops attach to end of conveyor frame into the butt couplings, providing a firm end-of-unit fixed stop. This stop is available in light, medium and heavy duty construction.

BUTT END STOPS MODEL NUMBER BSH-1.5-4-51

BS (light, medium, heavy or extra heavy duty*)-(height above frame)-(frame size)-(between frames@)
*Specify L for light duty, M for medium duty or H for heavy duty.

@Specify 12", 18" or 24" overall width for model BSL light duty butt end stop.

SPECIFICATIONS

CONSTRUCTION: 12 ga. for model BSL; 10 ga. for BSM; 7 ga. for BSH.

FRAME SIZE: Model BSL for 2.5" frame height ONLY; model BSM for 3.5", 4" and 4.5"; model BSH for 4" and 5" frame heights.

HEIGHT: Designed to extend 1.5" above top of frame.

WIDTHS: Model BSM and BSH widths include 13", 15", 17", 19", 21", 23", 25", 27", 31", 33", 37", 39", 43", 45", 47" and 51" BF; BSL available in 12", 18" and 24" OAW only.

■ 24 hour shipment