



Taylor Product  
Bulletin #CC-1901

## Roller Coatings & Sleeves



### Improved Traction

Coatings can prevent product slippage on the conveyor.

### Noise Reduction

Coatings can help produce less noise when contacting product and can be combined with ABEC-1 bearings for even less roller noise.

### Product Protection

Coatings cushion product surfaces, reducing scratching and marring.

### Prolonged Roller Life


Coatings can help protect rollers from abrasions, dents and other wear. Rollers available with urethane and vinyl sleeves. Coatings available in cast urethane, mill able urethane, black rubber, food grade and other materials based on the application. Slip Sleeves for minimum pressure accumulation.




Accumulation Sleeves



### Gravity Urethane Sleeved Roller

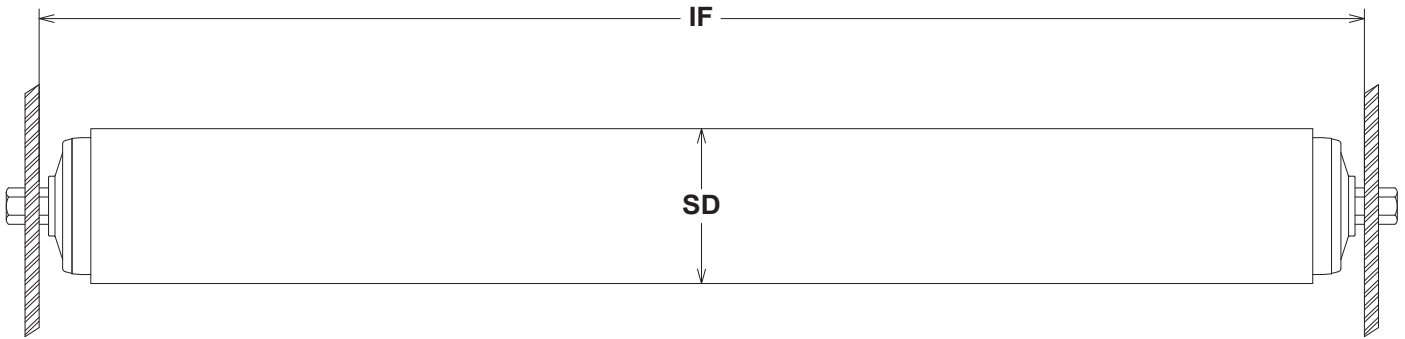


### Belt Driven Urethane Sleeved Roller

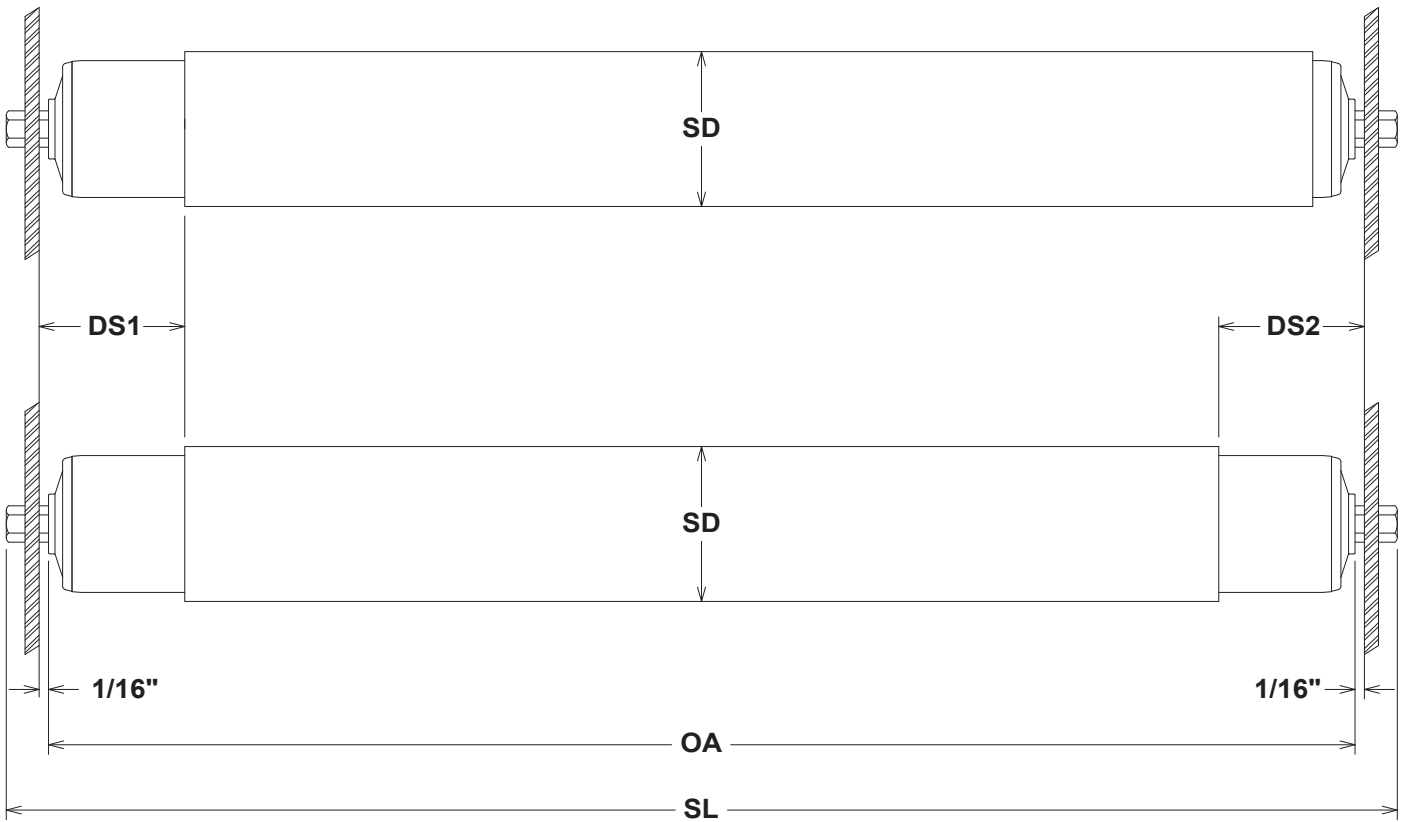


<p>Company: _____</p> <p>Contact: _____</p> <p>Phone: _____</p> <p>Fax: _____</p>	<p>Bearing = _____</p> <p>Tube = _____</p> <p>Shaft = _____</p> <p>SL = _____</p> <p>OA = _____</p> <p>IF = _____</p> <p>SD = _____</p> <p>DS1 = _____</p> <p>DS2 = _____</p>	<p>Commercial / ABEC-1 (Precision)</p> <p>Material - CS / SS / GALV</p> <p>Size / Configuration / Material</p> <p>Shaft Length Overall</p> <p>Overall Roller Length (hub to hub)</p> <p>Inside Frame Width</p> <p>Sleeve Diameter</p> <p>Drive Section Length</p> <p>Drive Section Length</p>
-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## “O” Ring Driven Urethane Sleeved Rollers

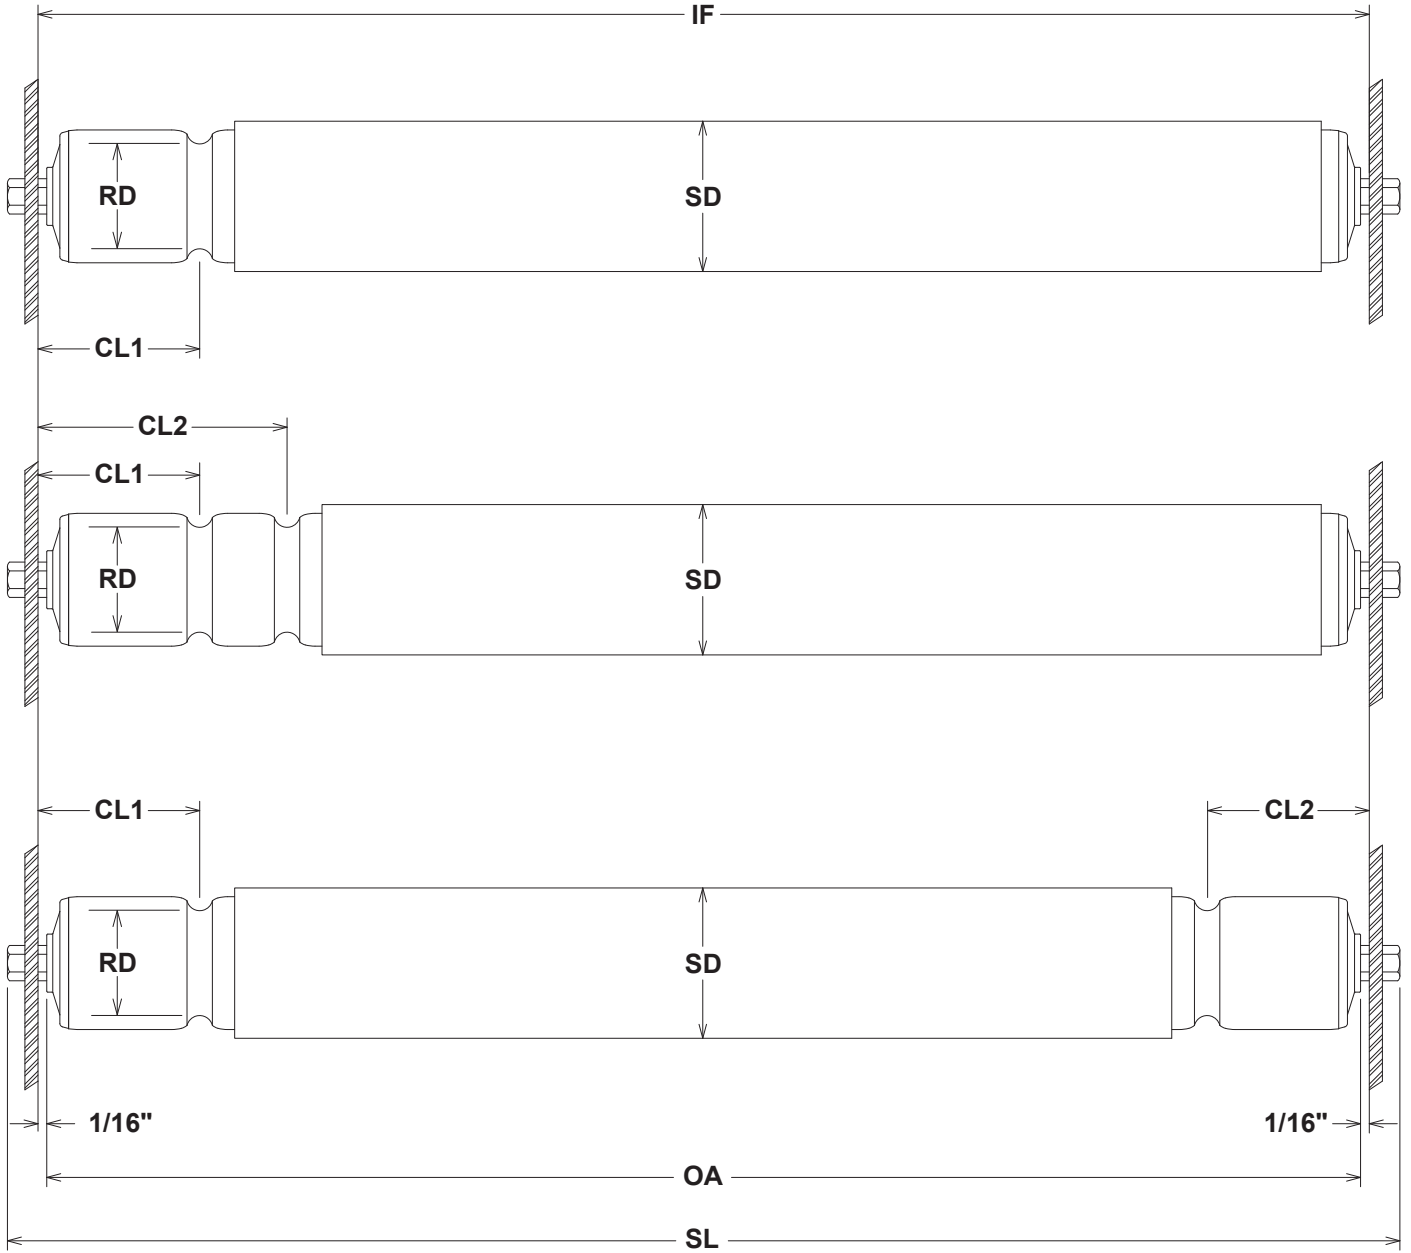

Company:	_____	Bearing = _____	Commercial / ABEC-1 (Precision)
Contact:	_____	Tube = _____	Material - CS / SS / GALV
Phone:	_____	Shaft = _____	Size / Configuration / Material
Fax:	_____	SL = _____	Shaft Length Overall
		OA = _____	Overall Roller Length (hub to hub)
		IF = _____	Inside Frame Width
		SD = _____	Sleeve Diameter
		CL1 = _____	Frame to Groove Center
		CL2 = _____	Frame to Groove Center
		RD = _____	Root Diameter of Grooves

### Sprocket Driven Urethane Sleeved Rollers

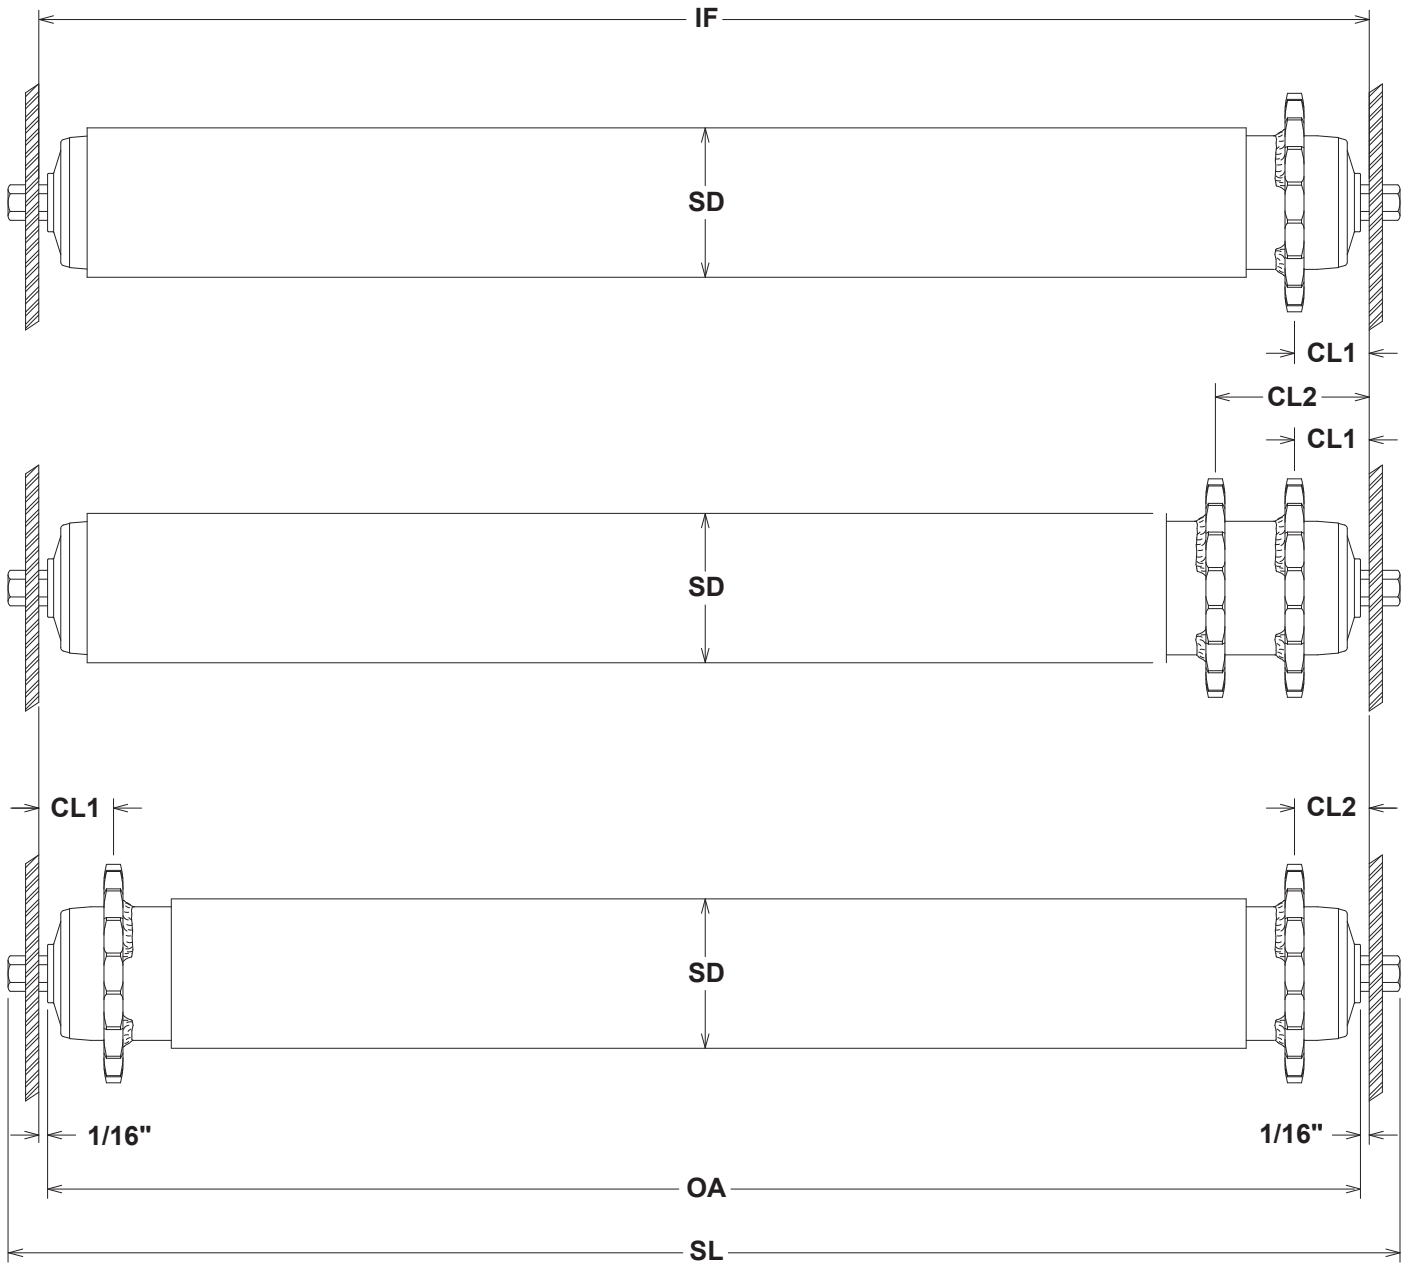

<b>Company:</b> _____	<b>Bearing =</b> _____	<b>Commercial / ABEC-1 (Precision)</b>
<b>Contact:</b> _____	<b>Tube =</b> _____	<b>Material - CS / SS / GALV</b>
<b>Phone:</b> _____	<b>Shaft =</b> _____	<b>Size / Configuration / Material</b>
<b>Fax:</b> _____	<b>SL =</b> _____	<b>Shaft Length Overall</b>
	<b>OA =</b> _____	<b>Overall Roller Length (hub to hub)</b>
	<b>IF =</b> _____	<b>Inside Frame Width</b>
	<b>SD =</b> _____	<b>Sleeve Diameter</b>
	<b>CL1 =</b> _____	<b>Frame to Sprocket Center</b>
	<b>CL2 =</b> _____	<b>Frame to Sprocket Center</b>
	<b>Sprocket =</b> _____	<b>Chain Size / # of Teeth</b>