


# PALLET STACKER / DISPENSER

- Frame:** Welded structural steel frame with heavy gauge steel enclosure panels.
- Magazine:** Steel lined with structural steel support channels on three sides, standard magazine 8' high, 15 pallet capacity. Loading / unloading of stacked pallets is available at 90° or 180° from in-feed / exit of drag chain conveyor.
- Fingers:** Pneumatically operated pallet holding fingers
- Lift:** Electrically driven hydraulic lift table to lift and lower stacks of pallets as required for stacking or dispensing of pallets.
- Controls:** PLC controlled with devices pre-mounted and wired to control enclosure for automatic and manual operation. "Hand-shake" ready.
- Conveyor:** Dual chain conveyor integrated within the unit extends 2'-6" beyond frame. Conveyor elevation 18" top of chain. Other conveyor lengths and elevations are available.
- Pallets:** Unit capable of stacking or dispensing a consistent pallet size. Pallets must be in good condition, and allow holding fingers to operate dependably.
- Paint:** ALBA standard blue, with safety yellow guards.



*Conveyor and accessories sold separately*

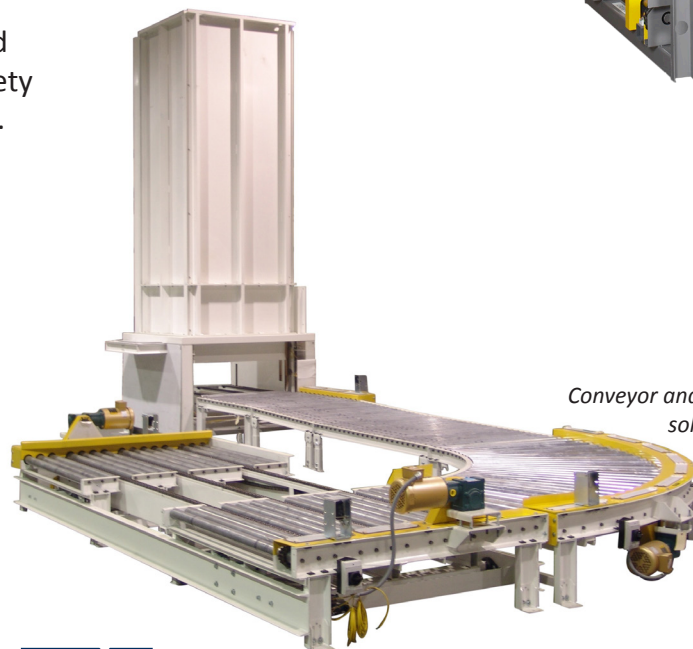

866.252.2634  
[www.albamfg.com](http://www.albamfg.com)  
[rocksolidconveyor@albamfg.com](mailto:rocksolidconveyor@albamfg.com)

