


HDC HEAVY DUTY C-HOOK

PRODUCT FEATURES

- Designed for heavy duty applications.
- High tensile alloy steel plate reduces physical size and weight.
- Counter balanced to hang level when empty.
- Inside radius on hooks avoid coil edge contact.
- Curved coil saddle is standard.
- Guide handles for ease of hook positioning.
- Handles a wide range of coil widths.
- Available with optional padding for additional coil protection.
- Complies with ASME standards.

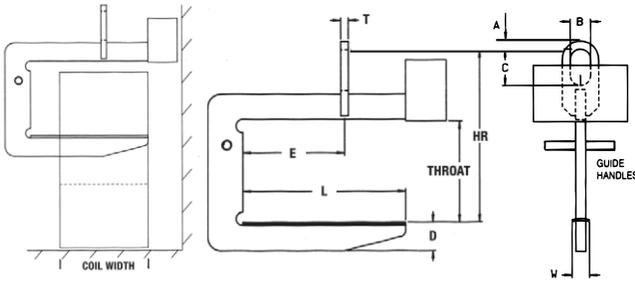

NOTE: E dimension is one-half of maximum coil width.

WARNING

CENTER OF THE HOIST AND BAIL MUST BE IN-LINE WITH THE LOAD'S CENTER OF GRAVITY.

SPECIFICATIONS

Model Number	Capacity (tons)	Dimensions (inches)											Weight (lbs.)
		Coil Width		Throat	Lifting Arm			HR Headroom	Bail Dimensions			Thk. T	
		Max.	Min.		Length L	Depth D	Width W		Opening				
								A	B	C			
HDC536	5	36	24	24	30	5-5/16	4	37-3/8	1-1/2	4	7	1-1/4	420
HDC548		48	30	24	39	6-1/8	4	38	1-1/2	4	7	1-1/4	584
HDC560		60	36	24	48	6-9/16	4	38-1/2	1-1/2	4	7	1-1/4	680
HDC7536	7-1/2	36	24	24	30	5-5/8	4	37-1/2	1-1/2	4	7	1-1/2	615
HDC7548		48	30	24	39	6-5/16	4	38-1/4	1-1/2	4	7	1-1/2	774
HDC7560		60	36	24	48	6-5/16	4	39	1-1/2	4	7	1-1/2	942
HDC1048	10	48	30	24	39	7-1/4	4	41-1/4	2	5	9	1-3/4	928
HDC1060		60	36	24	48	7-1/2	4	41-3/8	2	5	9	1-3/4	1295
HDC1072		72	42	24	57	7-1/4	4	42-1/2	2	5	9	1-3/4	1616
HDC1548	15	48	30	30	39	7-1/4	4	47-7/8	2	5	9	1-3/4	1450
HDC1560		60	36	30	48	8	4	48	2	5	9	1-3/4	1824
HDC1572		72	42	30	57	8-3/4	4	48-3/4	2	5	9	1-3/4	2227
HDC2060	20	60	36	30	48	9-1/8	4	52-1/8	2-1/4	6	12	2	2175
HDC2072		72	42	30	57	10	4	52-5/16	2-1/4	6	12	2	2625
HDC2560	25	60	36	34	48	9	4	57-3/4	2-1/2	6	14	2-1/4	2820
HDC2572		72	42	34	57	9-3/4	4	58-1/2	2-1/2	6	14	2-1/4	3570
HDC3060	30	60	36	34	48	9-7/8	4	58-3/4	2-3/4	6	14	2-1/2	3180
HDC3072		72	42	34	57	10-5/8	4	59-3/8	2-3/4	6	14	2-1/2	3800
HDC4072	40	72	42	38	57	11	5	68	3-1/4	7	18	3	5350
HDC5084	50	84	48	40	64-1/2	13	6	71-7/8	3-3/4	7	18	3	7470

Other sizes available, consult factory.

COIL LIFTERS & UPENDERS